

# Shade

## Datasheet



### INSTALLATION

- Installation method: 2-lock for floating or glue down
- Installation instruction: Download from [www.tarkett.com](http://www.tarkett.com). Contact your supplier for more details
- Underfloor heating compatible. Maximum floor surface temperature 27°C with self-regulating underfloor heating system
- Start & Stop: Shorter lengths of planks included in approx. 1 pack per 20 m<sup>2</sup>

### MAINTENANCE

These Tarkett wooden floors have a Proteco surface treatment and therefore a strong protection against normal wear, abrasion, scratches and stains. Some floors will require more frequent maintenance for increased life span. Generally these products are light coloured floors and hardwax oiled floors, particularly with brushed surface and/or highlighted details.

Always make sure to follow the most recently updated maintenance instructions on [www.tarkett.com](http://www.tarkett.com).

### RECOMMENDED ACCESSORIES

- Installation: Tarkofoam II / Tarkoflex II / Installation kit
- Aesthetics: Skirting, Transition moulding, Pipe covers
- Care & maintenance: Tarkoclean for lacquered floors, Refresher for lacquered floors

---

See more alternatives and the complete range of accessories @ [www.tarkett.com](http://www.tarkett.com)

---

| Product Name                                 | Product Code | Page               |
|----------------------------------------------|--------------|--------------------|
| Shade - ASH IVORY PLANK (1-strip)            | 41006008     | <a href="#">3</a>  |
| Shade - OAK CREAM WHITE MIDIPLANK (1-strip)  | 41016001     | <a href="#">4</a>  |
| Shade - OAK EVENING GREY MIDIPLANK (1-strip) | 41016002     | <a href="#">5</a>  |
| Shade - OAK SNOW FLAKE MIDIPLANK (1-strip)   | 41016008     | <a href="#">6</a>  |
| Shade - OAK AUTHENTIC MIDIPLANK (1-strip)    | 41016009     | <a href="#">7</a>  |
| Shade - OAK NORTHERN WHITE TRES (3-strip)    | 41025001     | <a href="#">8</a>  |
| Shade - OAK STONE GREY PLANK (1-strip)       | 7876088      | <a href="#">9</a>  |
| Shade - OAK ITALIAN BROWN PLANK (1-strip)    | 7876112      | <a href="#">10</a> |
| Shade - OAK PRALINE PLANK (1-strip)          | 7876130      | <a href="#">11</a> |
| Shade - OAK COTTON WHITE PLANK XT (1-strip)  | 7877033      | <a href="#">12</a> |
| Shade - OAK COTTON WHITE PLANK XT (1-strip)  | 7877034      | <a href="#">13</a> |
| Shade - OAK CREAM WHITE PLANK XT (1-strip)   | 7877049      | <a href="#">14</a> |
| Shade - OAK ESSENCE PLANK XT (1-strip)       | 7877050      | <a href="#">15</a> |
| Shade - OAK MISTY GREY PLANK XT (1-strip)    | 7877070      | <a href="#">16</a> |
| Shade - OAK SOFT BEIGE PLANK (1-strip)       | 7878023      | <a href="#">17</a> |
| Shade - OAK NUTMEG PLANK XT (1-strip)        | 7879032      | <a href="#">18</a> |
| Shade - ASH LINEN WHITE PLANK (1-strip)      | 7967908      | <a href="#">19</a> |
| Shade - ASH LINEN WHITE PLANK (1-strip)      | 7967909      | <a href="#">20</a> |
| Shade - ASH MELANGE TRES (3-strip)           | 7969003      | <a href="#">21</a> |
| Shade - ASH LINEN WHITE TRES (3-strip)       | 7969009      | <a href="#">22</a> |
| Shade - OAK MISTY GREY TRES (3-strip)        | 8723040      | <a href="#">23</a> |
| Shade - OAK ALMOND TRES (3-strip)            | 8723042      | <a href="#">24</a> |
| Shade - OAK CREAM WHITE TRES (3-strip)       | 8723925      | <a href="#">25</a> |
| Shade - OAK COTTON WHITE TRES (3-strip)      | 8723926      | <a href="#">26</a> |
| Shade - OAK SOFT BEIGE TRES (3-strip)        | 8723927      | <a href="#">27</a> |
| Shade - OAK COTTON WHITE DUOPLANK (2-strip)  | 8727004      | <a href="#">28</a> |
| Shade - OAK ESSENCE DUOPLANK (2-strip)       | 8727009      | <a href="#">29</a> |
| Shade - OAK ITALIAN BROWN DUOPLANK (2-strip) | 8727013      | <a href="#">30</a> |
| Shade - OAK CREAM WHITE DUOPLANK (2-strip)   | 8727901      | <a href="#">31</a> |

# Shade - ASH IVORY PLANK (1-strip)

## Datasheet


| Product Information                                  | Tarkett Value                               |
|------------------------------------------------------|---------------------------------------------|
| Material code                                        | 41006008                                    |
| Format                                               | Plank 162 x 2000 mm                         |
| Pattern                                              | (1-strip)                                   |
| Surface treatment                                    | Proteco Natura                              |
| Surface effect                                       | None                                        |
| Bevelled edges                                       | 2-side minibevel                            |
| Wear layer thickness                                 | 2,5 mm                                      |
| Total thickness                                      | 13 mm                                       |
| Items per box                                        | 6                                           |
| Surface per box                                      | 1,94 m <sup>2</sup>                         |
| Surface per pallet                                   | 69,84 m <sup>2</sup>                        |
| Net weight                                           | 7,3 kg                                      |
| Character                                            | Calm                                        |
| Latin Name                                           | Fraxinus Angustifolia                       |
| Declaration of Performance #                         | 0190-0103                                   |
| EPD Number                                           | S-P-06627                                   |
| Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3) | -4,35 kg CO <sub>2</sub> eq /m <sup>2</sup> |
| LRV - overall average / Standard deviation           | 82 / 1                                      |

Due to the nature of the material this table shows typical values.

| Characteristics & Technical Performance                                          | Tarkett Value                            | Norm                          |
|----------------------------------------------------------------------------------|------------------------------------------|-------------------------------|
| Reaction to fire                                                                 | Dfl-s1                                   | EN 14342 - Table 1            |
| Formaldehyde emission                                                            | E1                                       | EN 14342                      |
| Brinell hardness (average value)                                                 | 4                                        | (BHN) EN 1534                 |
| Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II | $\geq 17$                                | EN ISO 10140-3 / EN ISO 717-2 |
| Thermal insulation value : board only (RT m2 K/W)                                | 0.101                                    | EN ISO 10456:2007             |
| Thermal insulation value : with rag felt (RT m2 K/W)                             | 0.121                                    | EN ISO 10456:2007             |
| Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)               | 0.141                                    | EN ISO 10456:2007             |
| Thermal conductivity (W/m K)                                                     | 0.104                                    | EN 12664 / EN 14342:2013      |
| Slip Resistance                                                                  | Low risk of slip                         | BS 7976-2                     |
| Construction                                                                     | Softwood Veneer and Lamella core 3-layer |                               |



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

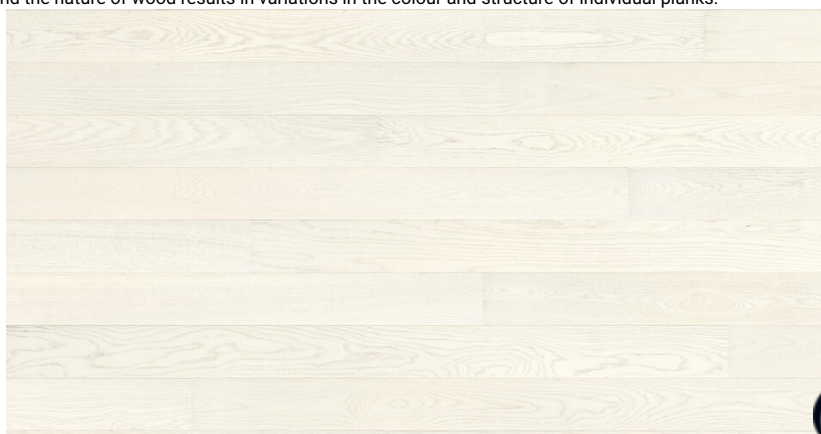

# Shade - OAK CREAM WHITE MIDIPLANK (1-strip)

## Datasheet


| Product Information                                  | Tarkett Value                               |
|------------------------------------------------------|---------------------------------------------|
| Material code                                        | 41016001                                    |
| Format                                               | Plank 134 x 1850 mm                         |
| Pattern                                              | (1-strip)                                   |
| Surface treatment                                    | Proteco Natura                              |
| Surface effect                                       | Brushed                                     |
| Bevelled edges                                       | 2-side minibevel                            |
| Wear layer thickness                                 | 2,5 mm                                      |
| Total thickness                                      | 13 mm                                       |
| Items per box                                        | 8                                           |
| Surface per box                                      | 1,98 m <sup>2</sup>                         |
| Surface per pallet                                   | 55,44 m <sup>2</sup>                        |
| Net weight                                           | 7,3 kg                                      |
| Character                                            | Lively                                      |
| Latin Name                                           | Quercus Robur & Quercus Petraea             |
| Declaration of Performance #                         | 0190-0103                                   |
| EPD Number                                           | S-P-06627                                   |
| Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3) | -4,35 kg CO <sub>2</sub> eq /m <sup>2</sup> |
| LRV - overall average / Standard deviation           | 40 / 4                                      |

Due to the nature of the material this table shows typical values.

| Characteristics & Technical Performance                                          | Tarkett Value                            | Norm                          |
|----------------------------------------------------------------------------------|------------------------------------------|-------------------------------|
| Reaction to fire                                                                 | Dfl-s1                                   | EN 14342 - Table 1            |
| Formaldehyde emission                                                            | E1                                       | EN 14342                      |
| Brinell hardness (average value)                                                 | 3.7                                      | (BHN) EN 1534                 |
| Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II | $\geq 17$                                | EN ISO 10140-3 / EN ISO 717-2 |
| Thermal insulation value : board only (RT m <sup>2</sup> K/W)                    | 0.101                                    | EN ISO 10456:2007             |
| Thermal insulation value : with rag felt (RT m <sup>2</sup> K/W)                 | 0.121                                    | EN ISO 10456:2007             |
| Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m <sup>2</sup> K/W)   | 0.141                                    | EN ISO 10456:2007             |
| Thermal conductivity (W/m K)                                                     | 0.104                                    | EN 12664 / EN 14342:2013      |
| Slip Resistance                                                                  | Low risk of slip                         | BS 7976-2                     |
| Construction                                                                     | Softwood Veneer and Lamella core 3-layer |                               |



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

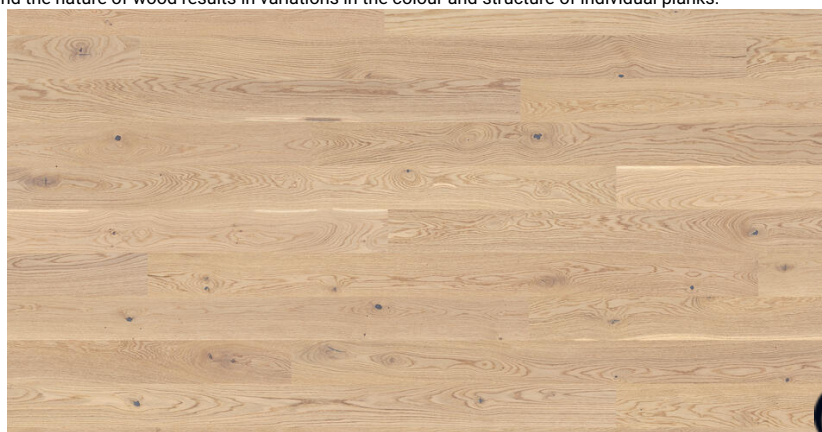

# Shade - OAK EVENING GREY MIDIPLANK (1-strip)

## Datasheet


| Product Information                                  | Tarkett Value                               |
|------------------------------------------------------|---------------------------------------------|
| Material code                                        | 41016002                                    |
| Format                                               | Plank 134 x 1850 mm                         |
| Pattern                                              | (1-strip)                                   |
| Surface treatment                                    | Proteco Natura                              |
| Surface effect                                       | Brushed                                     |
| Bevelled edges                                       | 2-side minibevel                            |
| Wear layer thickness                                 | 2,5 mm                                      |
| Total thickness                                      | 13 mm                                       |
| Items per box                                        | 8                                           |
| Surface per box                                      | 1,98 m <sup>2</sup>                         |
| Surface per pallet                                   | 55,44 m <sup>2</sup>                        |
| Net weight                                           | 7,3 kg                                      |
| Character                                            | Lively                                      |
| Latin Name                                           | Quercus Robur & Quercus Petraea             |
| Declaration of Performance #                         | 0190-0103                                   |
| EPD Number                                           | S-P-06627                                   |
| Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3) | -4,35 kg CO <sub>2</sub> eq /m <sup>2</sup> |
| LRV - overall average / Standard deviation           | 32 / 2                                      |

Due to the nature of the material this table shows typical values.

| Characteristics & Technical Performance                                          | Tarkett Value                               | Norm                          |
|----------------------------------------------------------------------------------|---------------------------------------------|-------------------------------|
| Reaction to fire                                                                 | Dfl-s1                                      | EN 14342 - Table 1            |
| Formaldehyde emission                                                            | E1                                          | EN 14342                      |
| Brinell hardness (average value)                                                 | 3.7                                         | (BHN) EN 1534                 |
| Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II | $\geq 17$                                   | EN ISO 10140-3 / EN ISO 717-2 |
| Thermal insulation value : board only (RT m <sup>2</sup> K/W)                    | 0.101                                       | EN ISO 10456:2007             |
| Thermal insulation value : with rag felt (RT m <sup>2</sup> K/W)                 | 0.121                                       | EN ISO 10456:2007             |
| Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m <sup>2</sup> K/W)   | 0.141                                       | EN ISO 10456:2007             |
| Thermal conductivity (W/m K)                                                     | 0.104                                       | EN 12664 / EN 14342:2013      |
| Slip Resistance                                                                  | Low risk of slip                            | BS 7976-2                     |
| Construction                                                                     | Softwood Veneer and<br>Lamella core 3-layer |                               |



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

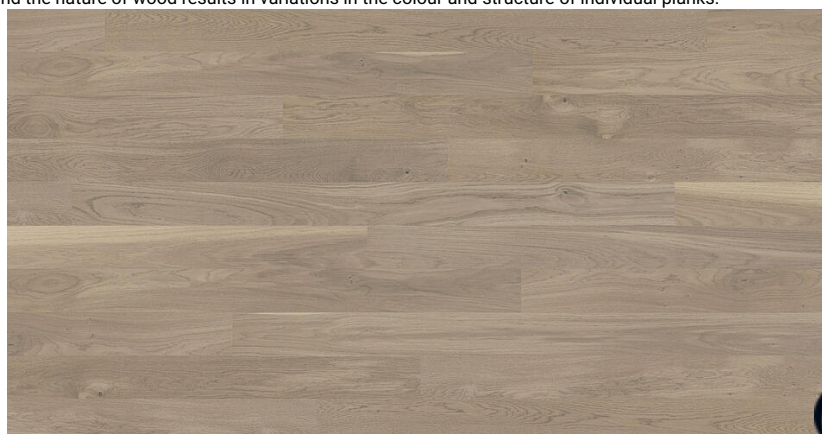

# Shade - OAK SNOW FLAKE MIDIPLANK (1-strip)

## Datasheet


| Product Information                                  | Tarkett Value                               |
|------------------------------------------------------|---------------------------------------------|
| Material code                                        | 41016008                                    |
| Format                                               | Plank 134 x 1850 mm                         |
| Pattern                                              | (1-strip)                                   |
| Surface treatment                                    | Proteco Natura                              |
| Surface effect                                       | Brushed                                     |
| Bevelled edges                                       | 2-side minibevel                            |
| Wear layer thickness                                 | 2,5 mm                                      |
| Total thickness                                      | 13 mm                                       |
| Items per box                                        | 8                                           |
| Surface per box                                      | 1,98 m <sup>2</sup>                         |
| Surface per pallet                                   | 55,44 m <sup>2</sup>                        |
| Net weight                                           | 7,3 kg                                      |
| Character                                            | Lively                                      |
| Latin Name                                           | Quercus Robur & Quercus Petraea             |
| Declaration of Performance #                         | 0190-0103                                   |
| EPD Number                                           | S-P-06627                                   |
| Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3) | -4,35 kg CO <sub>2</sub> eq /m <sup>2</sup> |
| LRV - overall average / Standard deviation           | 53 / 2                                      |

Due to the nature of the material this table shows typical values.

| Characteristics & Technical Performance                                          | Tarkett Value                               | Norm                          |
|----------------------------------------------------------------------------------|---------------------------------------------|-------------------------------|
| Reaction to fire                                                                 | Dfl-s1                                      | EN 14342 - Table 1            |
| Formaldehyde emission                                                            | E1                                          | EN 14342                      |
| Brinell hardness (average value)                                                 | 3.7                                         | (BHN) EN 1534                 |
| Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II | $\geq 17$                                   | EN ISO 10140-3 / EN ISO 717-2 |
| Thermal insulation value : board only (RT m <sup>2</sup> K/W)                    | 0.101                                       | EN ISO 10456:2007             |
| Thermal insulation value : with rag felt (RT m <sup>2</sup> K/W)                 | 0.121                                       | EN ISO 10456:2007             |
| Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m <sup>2</sup> K/W)   | 0.141                                       | EN ISO 10456:2007             |
| Thermal conductivity (W/m K)                                                     | 0.104                                       | EN 12664 / EN 14342:2013      |
| Slip Resistance                                                                  | Low risk of slip                            | BS 7976-2                     |
| Construction                                                                     | Softwood Veneer and<br>Lamella core 3-layer |                               |



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

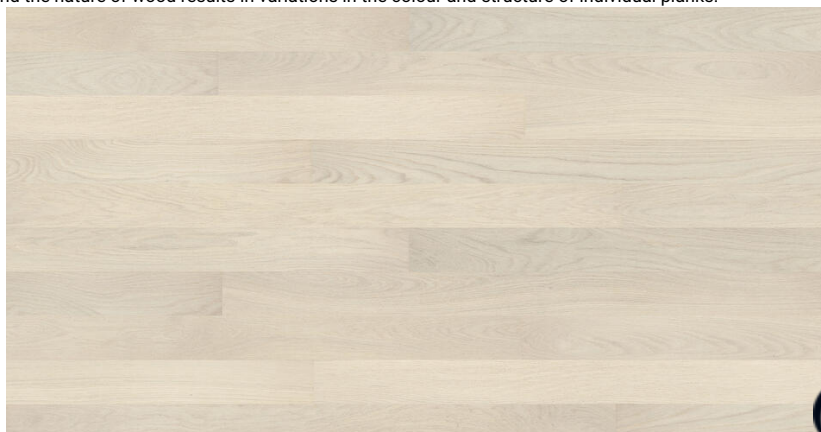

# Shade - OAK AUTHENTIC MIDIPLANK (1-strip)

## Datasheet


| Product Information                                  | Tarkett Value                               |
|------------------------------------------------------|---------------------------------------------|
| Material code                                        | 41016009                                    |
| Format                                               | Plank 134 x 1850 mm                         |
| Pattern                                              | (1-strip)                                   |
| Surface treatment                                    | Proteco Natura                              |
| Surface effect                                       | Brushed                                     |
| Bevelled edges                                       | 2-side minibevel                            |
| Wear layer thickness                                 | 2,5 mm                                      |
| Total thickness                                      | 13 mm                                       |
| Items per box                                        | 8                                           |
| Surface per box                                      | 1,98 m <sup>2</sup>                         |
| Surface per pallet                                   | 55,44 m <sup>2</sup>                        |
| Net weight                                           | 7,3 kg                                      |
| Character                                            | Lively                                      |
| Latin Name                                           | Quercus Robur & Quercus Petraea             |
| Declaration of Performance #                         | 0190-0103                                   |
| EPD Number                                           | S-P-06627                                   |
| Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3) | -4,35 kg CO <sub>2</sub> eq /m <sup>2</sup> |
| LRV - overall average / Standard deviation           | 38 / 5                                      |

Due to the nature of the material this table shows typical values.

| Characteristics & Technical Performance                                          | Tarkett Value                            | Norm                          |
|----------------------------------------------------------------------------------|------------------------------------------|-------------------------------|
| Reaction to fire                                                                 | Dfl-s1                                   | EN 14342 - Table 1            |
| Formaldehyde emission                                                            | E1                                       | EN 14342                      |
| Brinell hardness (average value)                                                 | 3.7                                      | (BHN) EN 1534                 |
| Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II | $\geq 17$                                | EN ISO 10140-3 / EN ISO 717-2 |
| Thermal insulation value : board only (RT m <sup>2</sup> K/W)                    | 0.101                                    | EN ISO 10456:2007             |
| Thermal insulation value : with rag felt (RT m <sup>2</sup> K/W)                 | 0.121                                    | EN ISO 10456:2007             |
| Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m <sup>2</sup> K/W)   | 0.141                                    | EN ISO 10456:2007             |
| Thermal conductivity (W/m K)                                                     | 0.104                                    | EN 12664 / EN 14342:2013      |
| Slip Resistance                                                                  | Low risk of slip                         | BS 7976-2                     |
| Construction                                                                     | Softwood Veneer and Lamella core 3-layer |                               |



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

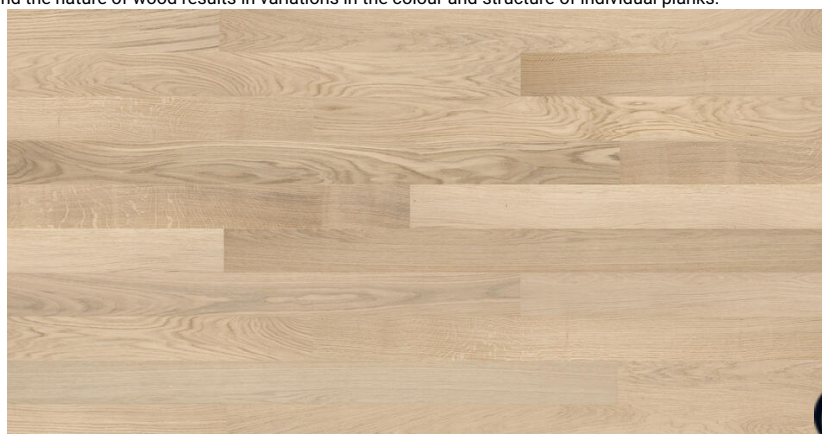

# Shade - OAK NORTHERN WHITE TRES (3-strip)

## Datasheet


| Product Information                                  | Tarkett Value                               |
|------------------------------------------------------|---------------------------------------------|
| Material code                                        | 41025001                                    |
| Format                                               | Plank 194 x 2281 mm                         |
| Pattern                                              | (3-strip)                                   |
| Surface treatment                                    | Proteco Natura                              |
| Surface effect                                       | None                                        |
| Wear layer thickness                                 | 2,5 mm                                      |
| Total thickness                                      | 13 mm                                       |
| Items per box                                        | 6                                           |
| Surface per box                                      | 2,66 m <sup>2</sup>                         |
| Surface per pallet                                   | 106,4 m <sup>2</sup>                        |
| Net weight                                           | 6,7 kg                                      |
| Character                                            | Calm                                        |
| Latin Name                                           | Quercus Rubra                               |
| Declaration of Performance #                         | 0020-0104                                   |
| EPD Number                                           | S-P-01509                                   |
| Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3) | -7,49 kg CO <sub>2</sub> eq /m <sup>2</sup> |
| LRV - overall average / Standard deviation           | 59 / 4                                      |

Due to the nature of the material this table shows typical values.

| Characteristics & Technical Performance                                          | Tarkett Value                            | Norm                          |
|----------------------------------------------------------------------------------|------------------------------------------|-------------------------------|
| Reaction to fire                                                                 | Dfl-s1                                   | EN 14342 - Table 1            |
| Formaldehyde emission                                                            | E1                                       | EN 14342                      |
| Brinell hardness (average value)                                                 | 3.7                                      | (BHN) EN 1534                 |
| Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II | $\geq 17$                                | EN ISO 10140-3 / EN ISO 717-2 |
| Thermal insulation value : board only (RT m <sup>2</sup> K/W)                    | 0.101                                    | EN ISO 10456:2007             |
| Thermal insulation value : with rag felt (RT m <sup>2</sup> K/W)                 | 0.121                                    | EN ISO 10456:2007             |
| Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m <sup>2</sup> K/W)   | 0.141                                    | EN ISO 10456:2007             |
| Thermal conductivity (W/m K)                                                     | 0.104                                    | EN 12664 / EN 14342:2013      |
| Slip Resistance                                                                  | Low risk of slip                         | BS 7976-2                     |
| Construction                                                                     | Softwood Veneer and Lamella core 3-layer |                               |



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

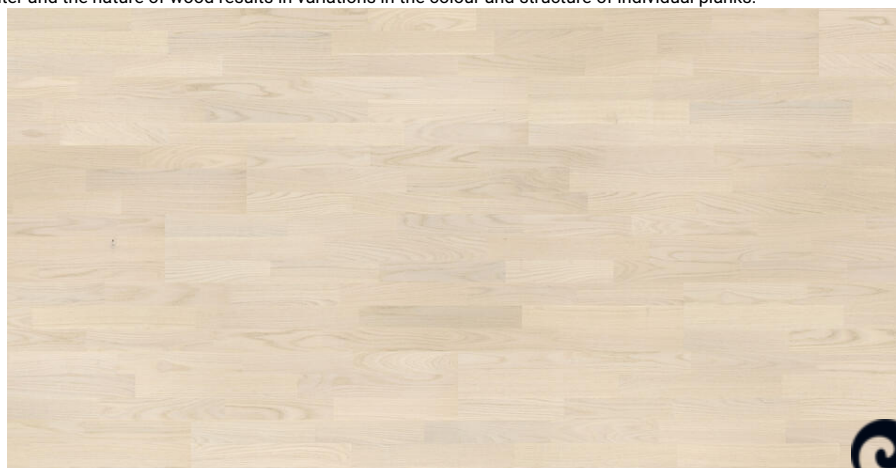

# Shade - OAK STONE GREY PLANK (1-strip)

## Datasheet


| Product Information                                  | Tarkett Value                               |
|------------------------------------------------------|---------------------------------------------|
| Material code                                        | 7876088                                     |
| Format                                               | Plank 162 x 2000 mm                         |
| Pattern                                              | (1-strip)                                   |
| Surface treatment                                    | Proteco Natura                              |
| Surface effect                                       | Brushed                                     |
| Bevelled edges                                       | 2-side minibevel                            |
| Wear layer thickness                                 | 3,5 mm                                      |
| Total thickness                                      | 14 mm                                       |
| Items per box                                        | 6                                           |
| Surface per box                                      | 1,94 m <sup>2</sup>                         |
| Surface per pallet                                   | 69,84 m <sup>2</sup>                        |
| Net weight                                           | 7,9 kg                                      |
| Character                                            | Calm                                        |
| Latin Name                                           | Quercus Robur & Quercus Petraea             |
| Declaration of Performance #                         | 0190-0105                                   |
| EPD Number                                           | S-P-06627                                   |
| Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3) | -4,35 kg CO <sub>2</sub> eq /m <sup>2</sup> |
| LRV - overall average / Standard deviation           | 15 / 2                                      |

Due to the nature of the material this table shows typical values.

| Characteristics & Technical Performance                                          | Tarkett Value                               | Norm                          |
|----------------------------------------------------------------------------------|---------------------------------------------|-------------------------------|
| Reaction to fire                                                                 | Dfl-s1                                      | EN 14342 - Table 1            |
| Formaldehyde emission                                                            | E1                                          | EN 14342                      |
| Brinell hardness (average value)                                                 | 3.7                                         | (BHN) EN 1534                 |
| Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II | $\geq 17$                                   | EN ISO 10140-3 / EN ISO 717-2 |
| Thermal insulation value : board only (RT m2 K/W)                                | 0.101                                       | EN ISO 10456:2007             |
| Thermal insulation value : with rag felt (RT m2 K/W)                             | 0.121                                       | EN ISO 10456:2007             |
| Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)               | 0.141                                       | EN ISO 10456:2007             |
| Thermal conductivity (W/m K)                                                     | 0.11                                        | EN 12664 / EN 14342:2013      |
| Slip Resistance                                                                  | Low risk of slip                            | BS 7976-2                     |
| Construction                                                                     | Softwood Veneer and<br>Lamella core 3-layer |                               |



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

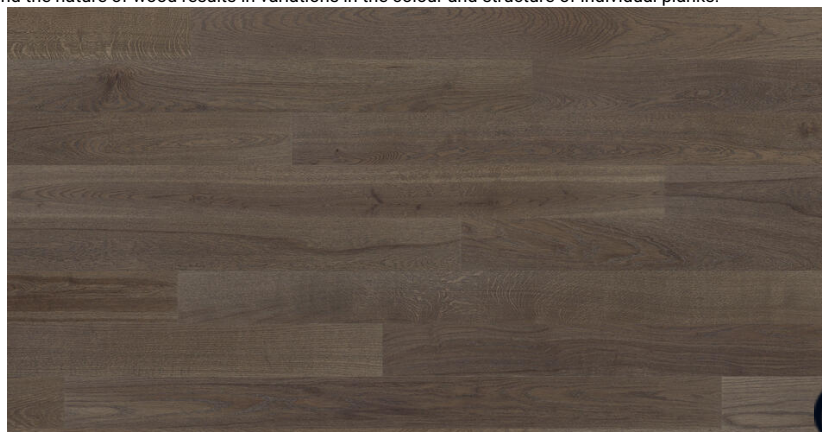

# Shade - OAK ITALIAN BROWN PLANK (1-strip)

## Datasheet

| Product Information                                  | Tarkett Value                               |
|------------------------------------------------------|---------------------------------------------|
| Material code                                        | 7876112                                     |
| Format                                               | Plank 162 x 2000 mm                         |
| Pattern                                              | (1-strip)                                   |
| Surface treatment                                    | Proteco Natura                              |
| Surface effect                                       | Brushed                                     |
| Bevelled edges                                       | 2-side minibevel                            |
| Wear layer thickness                                 | 3,5 mm                                      |
| Total thickness                                      | 14 mm                                       |
| Items per box                                        | 6                                           |
| Surface per box                                      | 1,94 m <sup>2</sup>                         |
| Surface per pallet                                   | 69,84 m <sup>2</sup>                        |
| Net weight                                           | 7,9 kg                                      |
| Character                                            | Lively                                      |
| Latin Name                                           | Quercus Robur & Quercus Petraea             |
| Declaration of Performance #                         | 0190-0105                                   |
| EPD Number                                           | S-P-06627                                   |
| Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3) | -4,35 kg CO <sub>2</sub> eq /m <sup>2</sup> |
| LRV - overall average / Standard deviation           | 15 / 2                                      |

Due to the nature of the material this table shows typical values.

| Characteristics & Technical Performance                                          | Tarkett Value                            | Norm                          |
|----------------------------------------------------------------------------------|------------------------------------------|-------------------------------|
| Reaction to fire                                                                 | Dfl-s1                                   | EN 14342 - Table 1            |
| Formaldehyde emission                                                            | E1                                       | EN 14342                      |
| Brinell hardness (average value)                                                 | 3.7                                      | (BHN) EN 1534                 |
| Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II | $\geq 17$                                | EN ISO 10140-3 / EN ISO 717-2 |
| Thermal insulation value : board only (RT m2 K/W)                                | 0.101                                    | EN ISO 10456:2007             |
| Thermal insulation value : with rag felt (RT m2 K/W)                             | 0.121                                    | EN ISO 10456:2007             |
| Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)               | 0.141                                    | EN ISO 10456:2007             |
| Thermal conductivity (W/m K)                                                     | 0.11                                     | EN 12664 / EN 14342:2013      |
| Slip Resistance                                                                  | Low risk of slip                         | BS 7976-2                     |
| Construction                                                                     | Softwood Veneer and Lamella core 3-layer |                               |



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.



# Shade - OAK PRALINE PLANK (1-strip)

## Datasheet


| Product Information                                  | Tarkett Value                               |
|------------------------------------------------------|---------------------------------------------|
| Material code                                        | 7876130                                     |
| Format                                               | Plank 162 x 2200 mm                         |
| Pattern                                              | (1-strip)                                   |
| Surface treatment                                    | Proteco Natura                              |
| Surface effect                                       | Brushed                                     |
| Bevelled edges                                       | 2-side minibevel                            |
| Wear layer thickness                                 | 3,5 mm                                      |
| Total thickness                                      | 14 mm                                       |
| Items per box                                        | 6                                           |
| Surface per box                                      | 2,14 m <sup>2</sup>                         |
| Surface per pallet                                   | 77,04 m <sup>2</sup>                        |
| Net weight                                           | 7,9 kg                                      |
| Character                                            | Lively                                      |
| Latin Name                                           | Quercus Robur & Quercus Petraea             |
| Declaration of Performance #                         | 0190-0105                                   |
| EPD Number                                           | S-P-06627                                   |
| Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3) | -4,35 kg CO <sub>2</sub> eq /m <sup>2</sup> |
| LRV - overall average / Standard deviation           | 19 / 4                                      |

Due to the nature of the material this table shows typical values.

| Characteristics & Technical Performance                                          | Tarkett Value                               | Norm                          |
|----------------------------------------------------------------------------------|---------------------------------------------|-------------------------------|
| Reaction to fire                                                                 | Dfl-s1                                      | EN 14342 - Table 1            |
| Formaldehyde emission                                                            | E1                                          | EN 14342                      |
| Brinell hardness (average value)                                                 | 3.7                                         | (BHN) EN 1534                 |
| Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II | $\geq 17$                                   | EN ISO 10140-3 / EN ISO 717-2 |
| Thermal insulation value : board only (RT m <sup>2</sup> K/W)                    | 0.101                                       | EN ISO 10456:2007             |
| Thermal insulation value : with rag felt (RT m <sup>2</sup> K/W)                 | 0.121                                       | EN ISO 10456:2007             |
| Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m <sup>2</sup> K/W)   | 0.141                                       | EN ISO 10456:2007             |
| Thermal conductivity (W/m K)                                                     | 0.11                                        | EN 12664 / EN 14342:2013      |
| Slip Resistance                                                                  | Low risk of slip                            | BS 7976-2                     |
| Construction                                                                     | Softwood Veneer and<br>Lamella core 3-layer |                               |



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

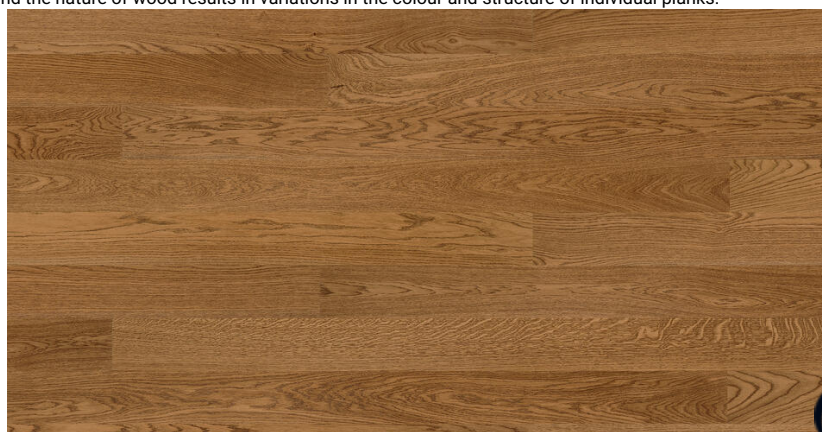

# Shade - OAK COTTON WHITE PLANK XT (1-strip)

## Datasheet


| Product Information                                  | Tarkett Value                               |
|------------------------------------------------------|---------------------------------------------|
| Material code                                        | 7877033                                     |
| Format                                               | Plank 190 x 2200 mm                         |
| Pattern                                              | (1-strip)                                   |
| Surface treatment                                    | Proteco Natura                              |
| Surface effect                                       | None                                        |
| Bevelled edges                                       | 2-side minibevel                            |
| Wear layer thickness                                 | 3,5 mm                                      |
| Total thickness                                      | 14 mm                                       |
| Items per box                                        | 6                                           |
| Surface per box                                      | 2,51 m <sup>2</sup>                         |
| Surface per pallet                                   | 87,85 m <sup>2</sup>                        |
| Net weight                                           | 7,9 kg                                      |
| Character                                            | Calm                                        |
| Latin Name                                           | Quercus Robur & Quercus Petraea             |
| Declaration of Performance #                         | 0190-0105                                   |
| EPD Number                                           | S-P-06627                                   |
| Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3) | -4,35 kg CO <sub>2</sub> eq /m <sup>2</sup> |
| LRV - overall average / Standard deviation           | 50 / 4                                      |

Due to the nature of the material this table shows typical values.

| Characteristics & Technical Performance                                          | Tarkett Value                            | Norm                          |
|----------------------------------------------------------------------------------|------------------------------------------|-------------------------------|
| Reaction to fire                                                                 | Dfl-s1                                   | EN 14342 - Table 1            |
| Formaldehyde emission                                                            | E1                                       | EN 14342                      |
| Brinell hardness (average value)                                                 | 3.7                                      | (BHN) EN 1534                 |
| Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II | $\geq 17$                                | EN ISO 10140-3 / EN ISO 717-2 |
| Thermal insulation value : board only (RT m <sup>2</sup> K/W)                    | 0.101                                    | EN ISO 10456:2007             |
| Thermal insulation value : with rag felt (RT m <sup>2</sup> K/W)                 | 0.121                                    | EN ISO 10456:2007             |
| Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m <sup>2</sup> K/W)   | 0.141                                    | EN ISO 10456:2007             |
| Thermal conductivity (W/m K)                                                     | 0.11                                     | EN 12664 / EN 14342:2013      |
| Slip Resistance                                                                  | Low risk of slip                         | BS 7976-2                     |
| Construction                                                                     | Softwood Veneer and Lamella core 3-layer |                               |



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

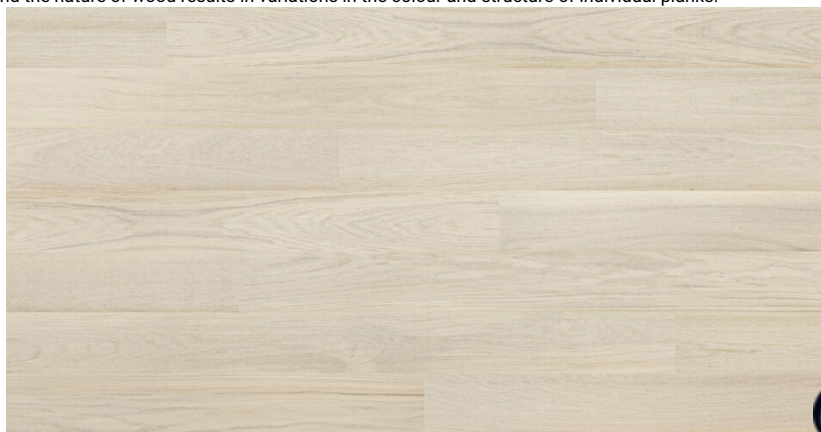

# Shade - OAK COTTON WHITE PLANK XT (1-strip)

## Datasheet


| Product Information                                  | Tarkett Value                               |
|------------------------------------------------------|---------------------------------------------|
| Material code                                        | 7877034                                     |
| Format                                               | Plank 190 x 2000 mm                         |
| Pattern                                              | (1-strip)                                   |
| Surface treatment                                    | Proteco Natura                              |
| Surface effect                                       | None                                        |
| Bevelled edges                                       | 2-side minibevel                            |
| Wear layer thickness                                 | 3,5 mm                                      |
| Total thickness                                      | 14 mm                                       |
| Items per box                                        | 6                                           |
| Surface per box                                      | 2,28 m <sup>2</sup>                         |
| Surface per pallet                                   | 79,8 m <sup>2</sup>                         |
| Net weight                                           | 7,9 kg                                      |
| Character                                            | Calm                                        |
| Latin Name                                           | Quercus Robur & Quercus Petraea             |
| Declaration of Performance #                         | 0190-0105                                   |
| EPD Number                                           | S-P-06627                                   |
| Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3) | -4,35 kg CO <sub>2</sub> eq /m <sup>2</sup> |
| LRV - overall average / Standard deviation           | 50 / 4                                      |

Due to the nature of the material this table shows typical values.

| Characteristics & Technical Performance                                          | Tarkett Value                            | Norm                          |
|----------------------------------------------------------------------------------|------------------------------------------|-------------------------------|
| Reaction to fire                                                                 | Dfl-s1                                   | EN 14342 - Table 1            |
| Formaldehyde emission                                                            | E1                                       | EN 14342                      |
| Brinell hardness (average value)                                                 | 3.7                                      | (BHN) EN 1534                 |
| Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II | $\geq 17$                                | EN ISO 10140-3 / EN ISO 717-2 |
| Thermal insulation value : board only (RT m <sup>2</sup> K/W)                    | 0.101                                    | EN ISO 10456:2007             |
| Thermal insulation value : with rag felt (RT m <sup>2</sup> K/W)                 | 0.121                                    | EN ISO 10456:2007             |
| Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m <sup>2</sup> K/W)   | 0.141                                    | EN ISO 10456:2007             |
| Thermal conductivity (W/m K)                                                     | 0.11                                     | EN 12664 / EN 14342:2013      |
| Slip Resistance                                                                  | Low risk of slip                         | BS 7976-2                     |
| Construction                                                                     | Softwood Veneer and Lamella core 3-layer |                               |



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

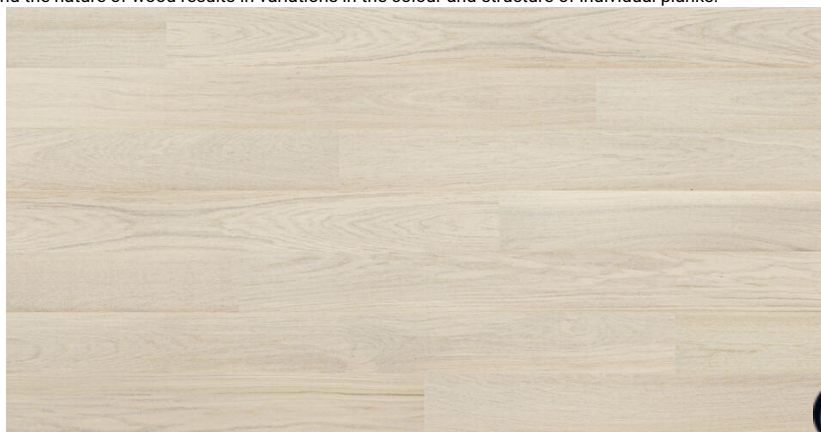

# Shade - OAK CREAM WHITE PLANK XT (1-strip)

## Datasheet


| Product Information                                  | Tarkett Value                   |
|------------------------------------------------------|---------------------------------|
| Material code                                        | 7877049                         |
| Format                                               | Plank 190 x 2000 mm             |
| Pattern                                              | (1-strip)                       |
| Surface treatment                                    | Proteco Natura                  |
| Surface effect                                       | Brushed                         |
| Bevelled edges                                       | 2-side minibevel                |
| Wear layer thickness                                 | 3,5 mm                          |
| Total thickness                                      | 14 mm                           |
| Items per box                                        | 6                               |
| Surface per box                                      | 2,28 m²                         |
| Surface per pallet                                   | 79,8 m²                         |
| Net weight                                           | 7,9 kg                          |
| Character                                            | Calm                            |
| Latin Name                                           | Quercus Robur & Quercus Petraea |
| Declaration of Performance #                         | 0190-0105                       |
| EPD Number                                           | S-P-06627                       |
| Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3) | -4,35 kg CO <sub>2</sub> eq /m² |
| LRV - overall average / Standard deviation           | 42 / 2                          |

Due to the nature of the material this table shows typical values.

| Characteristics & Technical Performance                                          | Tarkett Value                            | Norm                          |
|----------------------------------------------------------------------------------|------------------------------------------|-------------------------------|
| Reaction to fire                                                                 | Dfl-s1                                   | EN 14342 - Table 1            |
| Formaldehyde emission                                                            | E1                                       | EN 14342                      |
| Brinell hardness (average value)                                                 | 3.7                                      | (BHN) EN 1534                 |
| Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II | $\geq 17$                                | EN ISO 10140-3 / EN ISO 717-2 |
| Thermal insulation value : board only (RT m2 K/W)                                | 0.101                                    | EN ISO 10456:2007             |
| Thermal insulation value : with rag felt (RT m2 K/W)                             | 0.121                                    | EN ISO 10456:2007             |
| Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)               | 0.141                                    | EN ISO 10456:2007             |
| Thermal conductivity (W/m K)                                                     | 0.11                                     | EN 12664 / EN 14342:2013      |
| Slip Resistance                                                                  | Low risk of slip                         | BS 7976-2                     |
| Construction                                                                     | Softwood Veneer and Lamella core 3-layer |                               |



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

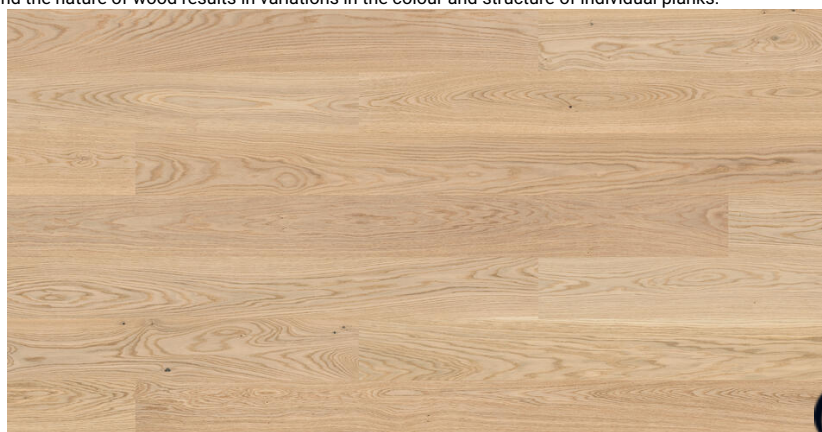

# Shade - OAK ESSENCE PLANK XT (1-strip)

## Datasheet


| Product Information                                  | Tarkett Value                               |
|------------------------------------------------------|---------------------------------------------|
| Material code                                        | 7877050                                     |
| Format                                               | Plank 190 x 2200 mm                         |
| Pattern                                              | (1-strip)                                   |
| Surface treatment                                    | Proteco Natura                              |
| Surface effect                                       | Brushed                                     |
| Bevelled edges                                       | 2-side minibevel                            |
| Wear layer thickness                                 | 3,5 mm                                      |
| Total thickness                                      | 14 mm                                       |
| Items per box                                        | 6                                           |
| Surface per box                                      | 2,51 m <sup>2</sup>                         |
| Surface per pallet                                   | 87,85 m <sup>2</sup>                        |
| Net weight                                           | 7,9 kg                                      |
| Character                                            | Calm                                        |
| Latin Name                                           | Quercus Robur & Quercus Petraea             |
| Declaration of Performance #                         | 0190-0105                                   |
| EPD Number                                           | S-P-06627                                   |
| Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3) | -4,35 kg CO <sub>2</sub> eq /m <sup>2</sup> |
| LRV - overall average / Standard deviation           | 39 / 4                                      |

Due to the nature of the material this table shows typical values.

| Characteristics & Technical Performance                                          | Tarkett Value                            | Norm                          |
|----------------------------------------------------------------------------------|------------------------------------------|-------------------------------|
| Reaction to fire                                                                 | Dfl-s1                                   | EN 14342 - Table 1            |
| Formaldehyde emission                                                            | E1                                       | EN 14342                      |
| Brinell hardness (average value)                                                 | 3.7                                      | (BHN) EN 1534                 |
| Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II | $\geq 17$                                | EN ISO 10140-3 / EN ISO 717-2 |
| Thermal insulation value : board only (RT m <sup>2</sup> K/W)                    | 0.101                                    | EN ISO 10456:2007             |
| Thermal insulation value : with rag felt (RT m <sup>2</sup> K/W)                 | 0.121                                    | EN ISO 10456:2007             |
| Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m <sup>2</sup> K/W)   | 0.141                                    | EN ISO 10456:2007             |
| Thermal conductivity (W/m K)                                                     | 0.11                                     | EN 12664 / EN 14342:2013      |
| Slip Resistance                                                                  | Low risk of slip                         | BS 7976-2                     |
| Construction                                                                     | Softwood Veneer and Lamella core 3-layer |                               |



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

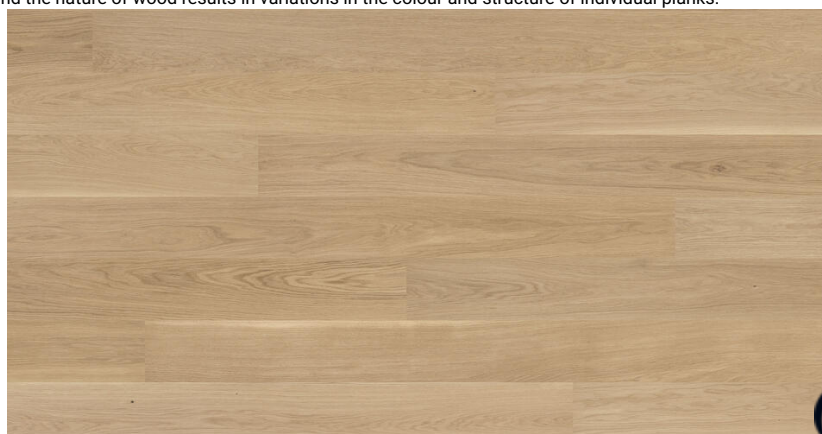

# Shade - OAK MISTY GREY PLANK XT (1-strip)

## Datasheet


| Product Information                                  | Tarkett Value                               |
|------------------------------------------------------|---------------------------------------------|
| Material code                                        | 7877070                                     |
| Format                                               | Plank 190 x 2200 mm                         |
| Pattern                                              | (1-strip)                                   |
| Surface treatment                                    | Proteco Natura                              |
| Surface effect                                       | Brushed                                     |
| Bevelled edges                                       | 2-side minibevel                            |
| Wear layer thickness                                 | 3,5 mm                                      |
| Total thickness                                      | 14 mm                                       |
| Items per box                                        | 6                                           |
| Surface per box                                      | 2,51 m <sup>2</sup>                         |
| Surface per pallet                                   | 87,85 m <sup>2</sup>                        |
| Net weight                                           | 7,9 kg                                      |
| Character                                            | Lively                                      |
| Latin Name                                           | Quercus Robur & Quercus Petraea             |
| Declaration of Performance #                         | 0190-0105                                   |
| EPD Number                                           | S-P-06627                                   |
| Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3) | -4,35 kg CO <sub>2</sub> eq /m <sup>2</sup> |
| LRV - overall average / Standard deviation           | 31 / 7                                      |

Due to the nature of the material this table shows typical values.

| Characteristics & Technical Performance                                          | Tarkett Value                            | Norm                          |
|----------------------------------------------------------------------------------|------------------------------------------|-------------------------------|
| Reaction to fire                                                                 | Dfl-s1                                   | EN 14342 - Table 1            |
| Formaldehyde emission                                                            | E1                                       | EN 14342                      |
| Brinell hardness (average value)                                                 | 3.7                                      | (BHN) EN 1534                 |
| Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II | $\geq 17$                                | EN ISO 10140-3 / EN ISO 717-2 |
| Thermal insulation value : board only (RT m <sup>2</sup> K/W)                    | 0.101                                    | EN ISO 10456:2007             |
| Thermal insulation value : with rag felt (RT m <sup>2</sup> K/W)                 | 0.121                                    | EN ISO 10456:2007             |
| Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m <sup>2</sup> K/W)   | 0.141                                    | EN ISO 10456:2007             |
| Thermal conductivity (W/m K)                                                     | 0.11                                     | EN 12664 / EN 14342:2013      |
| Slip Resistance                                                                  | Low risk of slip                         | BS 7976-2                     |
| Construction                                                                     | Softwood Veneer and Lamella core 3-layer |                               |



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

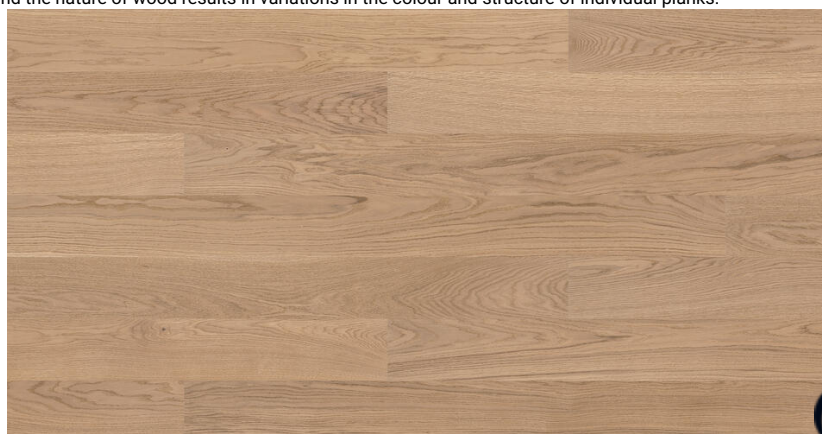

# Shade - OAK SOFT BEIGE PLANK (1-strip)

## Datasheet


| Product Information                                  | Tarkett Value                               |
|------------------------------------------------------|---------------------------------------------|
| Material code                                        | 7878023                                     |
| Format                                               | Plank 162 x 2200 mm                         |
| Pattern                                              | (1-strip)                                   |
| Surface treatment                                    | Proteco Natura                              |
| Surface effect                                       | Brushed                                     |
| Bevelled edges                                       | 2-side minibevel                            |
| Wear layer thickness                                 | 2,5 mm                                      |
| Total thickness                                      | 13 mm                                       |
| Items per box                                        | 6                                           |
| Surface per box                                      | 2,14 m <sup>2</sup>                         |
| Surface per pallet                                   | 77,04 m <sup>2</sup>                        |
| Net weight                                           | 7,3 kg                                      |
| Character                                            | Lively                                      |
| Latin Name                                           | Quercus Robur & Quercus Petraea             |
| Declaration of Performance #                         | 0190-0103                                   |
| EPD Number                                           | S-P-06627                                   |
| Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3) | -4,35 kg CO <sub>2</sub> eq /m <sup>2</sup> |
| LRV - overall average / Standard deviation           | 32 / 3                                      |

Due to the nature of the material this table shows typical values.

| Characteristics & Technical Performance                                          | Tarkett Value                               | Norm                          |
|----------------------------------------------------------------------------------|---------------------------------------------|-------------------------------|
| Reaction to fire                                                                 | Dfl-s1                                      | EN 14342 - Table 1            |
| Formaldehyde emission                                                            | E1                                          | EN 14342                      |
| Brinell hardness (average value)                                                 | 3.7                                         | (BHN) EN 1534                 |
| Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II | $\geq 17$                                   | EN ISO 10140-3 / EN ISO 717-2 |
| Thermal insulation value : board only (RT m2 K/W)                                | 0.101                                       | EN ISO 10456:2007             |
| Thermal insulation value : with rag felt (RT m2 K/W)                             | 0.121                                       | EN ISO 10456:2007             |
| Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)               | 0.141                                       | EN ISO 10456:2007             |
| Thermal conductivity (W/m K)                                                     | 0.104                                       | EN 12664 / EN 14342:2013      |
| Slip Resistance                                                                  | Low risk of slip                            | BS 7976-2                     |
| Construction                                                                     | Softwood Veneer and<br>Lamella core 3-layer |                               |



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

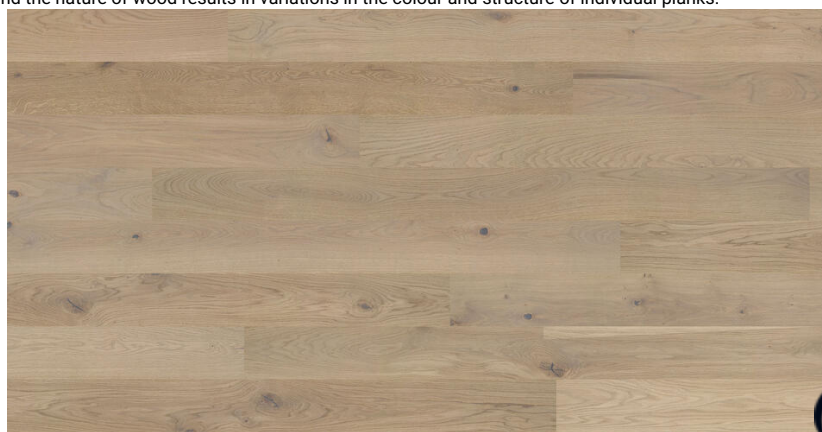

# Shade - OAK NUTMEG PLANK XT (1-strip)

## Datasheet


| Product Information                                  | Tarkett Value                   |
|------------------------------------------------------|---------------------------------|
| Material code                                        | 7879032                         |
| Format                                               | Plank 190 x 2000 mm             |
| Pattern                                              | (1-strip)                       |
| Surface treatment                                    | Proteco Natura                  |
| Surface effect                                       | Brushed                         |
| Bevelled edges                                       | 2-side minibevel                |
| Wear layer thickness                                 | 2,5 mm                          |
| Total thickness                                      | 13 mm                           |
| Items per box                                        | 6                               |
| Surface per box                                      | 2,28 m²                         |
| Surface per pallet                                   | 79,8 m²                         |
| Net weight                                           | 7,3 kg                          |
| Character                                            | Lively                          |
| Latin Name                                           | Quercus Robur & Quercus Petraea |
| Declaration of Performance #                         | 0190-0103                       |
| EPD Number                                           | S-P-06627                       |
| Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3) | -4,35 kg CO <sub>2</sub> eq /m² |
| LRV - overall average / Standard deviation           | 29 / 2                          |

Due to the nature of the material this table shows typical values.

| Characteristics & Technical Performance                                          | Tarkett Value                               | Norm                          |
|----------------------------------------------------------------------------------|---------------------------------------------|-------------------------------|
| Reaction to fire                                                                 | Dfl-s1                                      | EN 14342 - Table 1            |
| Formaldehyde emission                                                            | E1                                          | EN 14342                      |
| Brinell hardness (average value)                                                 | 3.7                                         | (BHN) EN 1534                 |
| Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II | $\geq 17$                                   | EN ISO 10140-3 / EN ISO 717-2 |
| Thermal insulation value : board only (RT m2 K/W)                                | 0.101                                       | EN ISO 10456:2007             |
| Thermal insulation value : with rag felt (RT m2 K/W)                             | 0.121                                       | EN ISO 10456:2007             |
| Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)               | 0.141                                       | EN ISO 10456:2007             |
| Thermal conductivity (W/m K)                                                     | 0.104                                       | EN 12664 / EN 14342:2013      |
| Slip Resistance                                                                  | Low risk of slip                            | BS 7976-2                     |
| Construction                                                                     | Softwood Veneer and<br>Lamella core 3-layer |                               |



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

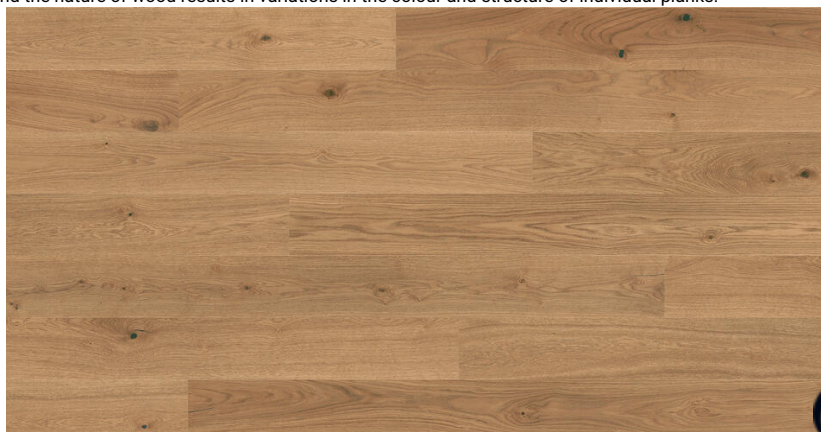

# Shade - ASH LINEN WHITE PLANK (1-strip)

## Datasheet


| Product Information                                  | Tarkett Value                               |
|------------------------------------------------------|---------------------------------------------|
| Material code                                        | 7967908                                     |
| Format                                               | Plank 162 x 2200 mm                         |
| Pattern                                              | (1-strip)                                   |
| Surface treatment                                    | Proteco Natura                              |
| Surface effect                                       | None                                        |
| Bevelled edges                                       | 2-side minibevel                            |
| Wear layer thickness                                 | 3,5 mm                                      |
| Total thickness                                      | 14 mm                                       |
| Items per box                                        | 6                                           |
| Surface per box                                      | 2,14 m <sup>2</sup>                         |
| Surface per pallet                                   | 77,04 m <sup>2</sup>                        |
| Net weight                                           | 7,9 kg                                      |
| Character                                            | Calm                                        |
| Latin Name                                           | Fraxinus Angustifolia                       |
| Declaration of Performance #                         | 0190-0105                                   |
| EPD Number                                           | S-P-06627                                   |
| Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3) | -4,35 kg CO <sub>2</sub> eq /m <sup>2</sup> |
| LRV - overall average / Standard deviation           | 64 / 4                                      |

Due to the nature of the material this table shows typical values.

| Characteristics & Technical Performance                                          | Tarkett Value                            | Norm                          |
|----------------------------------------------------------------------------------|------------------------------------------|-------------------------------|
| Reaction to fire                                                                 | Dfl-s1                                   | EN 14342 - Table 1            |
| Formaldehyde emission                                                            | E1                                       | EN 14342                      |
| Brinell hardness (average value)                                                 | 4                                        | (BHN) EN 1534                 |
| Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II | $\geq 17$                                | EN ISO 10140-3 / EN ISO 717-2 |
| Thermal insulation value : board only (RT m2 K/W)                                | 0.101                                    | EN ISO 10456:2007             |
| Thermal insulation value : with rag felt (RT m2 K/W)                             | 0.121                                    | EN ISO 10456:2007             |
| Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)               | 0.141                                    | EN ISO 10456:2007             |
| Thermal conductivity (W/m K)                                                     | 0.11                                     | EN 12664 / EN 14342:2013      |
| Slip Resistance                                                                  | Low risk of slip                         | BS 7976-2                     |
| Construction                                                                     | Softwood Veneer and Lamella core 3-layer |                               |



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

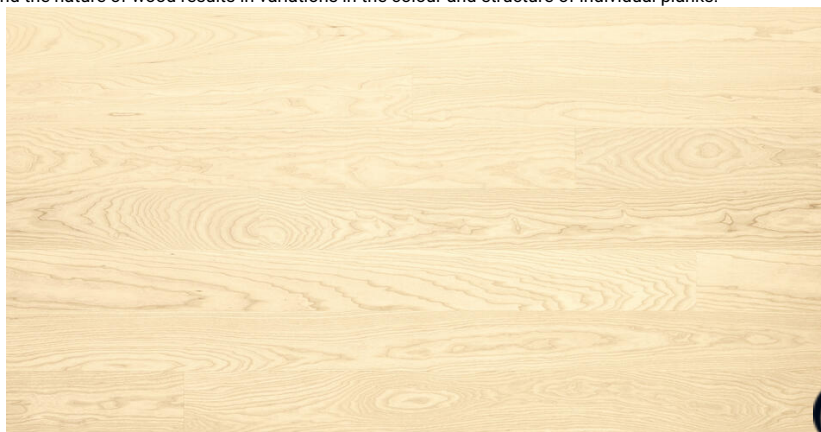

# Shade - ASH LINEN WHITE PLANK (1-strip)

## Datasheet


| Product Information                                  | Tarkett Value                               |
|------------------------------------------------------|---------------------------------------------|
| Material code                                        | 7967909                                     |
| Format                                               | Plank 162 x 2000 mm                         |
| Pattern                                              | (1-strip)                                   |
| Surface treatment                                    | Proteco Natura                              |
| Surface effect                                       | None                                        |
| Bevelled edges                                       | 2-side minibevel                            |
| Wear layer thickness                                 | 3,5 mm                                      |
| Total thickness                                      | 14 mm                                       |
| Items per box                                        | 6                                           |
| Surface per box                                      | 1,94 m <sup>2</sup>                         |
| Surface per pallet                                   | 69,84 m <sup>2</sup>                        |
| Net weight                                           | 7,9 kg                                      |
| Character                                            | Calm                                        |
| Latin Name                                           | Fraxinus Angustifolia                       |
| Declaration of Performance #                         | 0190-0105                                   |
| EPD Number                                           | S-P-06627                                   |
| Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3) | -4,35 kg CO <sub>2</sub> eq /m <sup>2</sup> |
| LRV - overall average / Standard deviation           | 64 / 4                                      |

Due to the nature of the material this table shows typical values.

| Characteristics & Technical Performance                                          | Tarkett Value                            | Norm                          |
|----------------------------------------------------------------------------------|------------------------------------------|-------------------------------|
| Reaction to fire                                                                 | Dfl-s1                                   | EN 14342 - Table 1            |
| Formaldehyde emission                                                            | E1                                       | EN 14342                      |
| Brinell hardness (average value)                                                 | 4                                        | (BHN) EN 1534                 |
| Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II | $\geq 17$                                | EN ISO 10140-3 / EN ISO 717-2 |
| Thermal insulation value : board only (RT m2 K/W)                                | 0.101                                    | EN ISO 10456:2007             |
| Thermal insulation value : with rag felt (RT m2 K/W)                             | 0.121                                    | EN ISO 10456:2007             |
| Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)               | 0.141                                    | EN ISO 10456:2007             |
| Thermal conductivity (W/m K)                                                     | 0.11                                     | EN 12664 / EN 14342:2013      |
| Slip Resistance                                                                  | Low risk of slip                         | BS 7976-2                     |
| Construction                                                                     | Softwood Veneer and Lamella core 3-layer |                               |



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

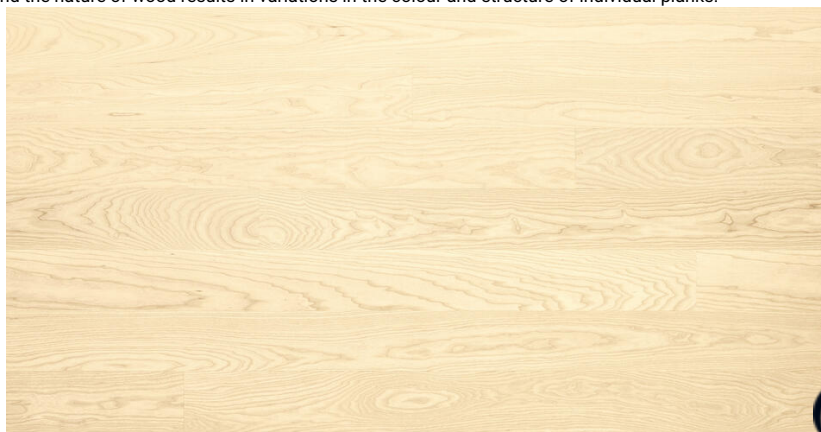

# Shade - ASH MELANGE TRES (3-strip)

## Datasheet

| Product Information                                  | Tarkett Value                               |
|------------------------------------------------------|---------------------------------------------|
| Material code                                        | 7969003                                     |
| Format                                               | Plank 194 x 2281 mm                         |
| Pattern                                              | (3-strip)                                   |
| Surface treatment                                    | Proteco Natura                              |
| Surface effect                                       | None                                        |
| Wear layer thickness                                 | 2,5 mm                                      |
| Total thickness                                      | 13 mm                                       |
| Items per box                                        | 6                                           |
| Surface per box                                      | 2,66 m <sup>2</sup>                         |
| Surface per pallet                                   | 106,4 m <sup>2</sup>                        |
| Net weight                                           | 6,7 kg                                      |
| Character                                            | Expressive                                  |
| Latin Name                                           | Fraxinus Angustifolia                       |
| Declaration of Performance #                         | 0020-0104                                   |
| EPD Number                                           | S-P-01509                                   |
| Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3) | -7,49 kg CO <sub>2</sub> eq /m <sup>2</sup> |
| LRV - overall average / Standard deviation           | 48 / 6                                      |

Due to the nature of the material this table shows typical values.

| Characteristics & Technical Performance                                          | Tarkett Value                            | Norm                          |
|----------------------------------------------------------------------------------|------------------------------------------|-------------------------------|
| Reaction to fire                                                                 | Dfl-s1                                   | EN 14342 - Table 1            |
| Formaldehyde emission                                                            | E1                                       | EN 14342                      |
| Brinell hardness (average value)                                                 | 4                                        | (BHN) EN 1534                 |
| Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II | $\geq 17$                                | EN ISO 10140-3 / EN ISO 717-2 |
| Thermal insulation value : board only (RT m <sup>2</sup> K/W)                    | 0.101                                    | EN ISO 10456:2007             |
| Thermal insulation value : with rag felt (RT m <sup>2</sup> K/W)                 | 0.121                                    | EN ISO 10456:2007             |
| Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m <sup>2</sup> K/W)   | 0.141                                    | EN ISO 10456:2007             |
| Thermal conductivity (W/m K)                                                     | 0.104                                    | EN 12664 / EN 14342:2013      |
| Slip Resistance                                                                  | Low risk of slip                         | BS 7976-2                     |
| Construction                                                                     | Softwood Veneer and Lamella core 3-layer |                               |



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.



# Shade - ASH LINEN WHITE TRES (3-strip)

## Datasheet


| Product Information                                  | Tarkett Value                               |
|------------------------------------------------------|---------------------------------------------|
| Material code                                        | 7969009                                     |
| Format                                               | Plank 194 x 2281 mm                         |
| Pattern                                              | (3-strip)                                   |
| Surface treatment                                    | Proteco Natura                              |
| Surface effect                                       | None                                        |
| Wear layer thickness                                 | 2,5 mm                                      |
| Total thickness                                      | 13 mm                                       |
| Items per box                                        | 6                                           |
| Surface per box                                      | 2,66 m <sup>2</sup>                         |
| Surface per pallet                                   | 106,4 m <sup>2</sup>                        |
| Net weight                                           | 6,7 kg                                      |
| Character                                            | Lively                                      |
| Latin Name                                           | Fraxinus Angustifolia                       |
| Declaration of Performance #                         | 0020-0104                                   |
| EPD Number                                           | S-P-01509                                   |
| Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3) | -7,49 kg CO <sub>2</sub> eq /m <sup>2</sup> |
| LRV - overall average / Standard deviation           | 61 / 5                                      |

Due to the nature of the material this table shows typical values.

| Characteristics & Technical Performance                                          | Tarkett Value                            | Norm                          |
|----------------------------------------------------------------------------------|------------------------------------------|-------------------------------|
| Reaction to fire                                                                 | Dfl-s1                                   | EN 14342 - Table 1            |
| Formaldehyde emission                                                            | E1                                       | EN 14342                      |
| Brinell hardness (average value)                                                 | 4                                        | (BHN) EN 1534                 |
| Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II | $\geq 17$                                | EN ISO 10140-3 / EN ISO 717-2 |
| Thermal insulation value : board only (RT m <sup>2</sup> K/W)                    | 0.101                                    | EN ISO 10456:2007             |
| Thermal insulation value : with rag felt (RT m <sup>2</sup> K/W)                 | 0.121                                    | EN ISO 10456:2007             |
| Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m <sup>2</sup> K/W)   | 0.141                                    | EN ISO 10456:2007             |
| Thermal conductivity (W/m K)                                                     | 0.104                                    | EN 12664 / EN 14342:2013      |
| Slip Resistance                                                                  | Low risk of slip                         | BS 7976-2                     |
| Construction                                                                     | Softwood Veneer and Lamella core 3-layer |                               |



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

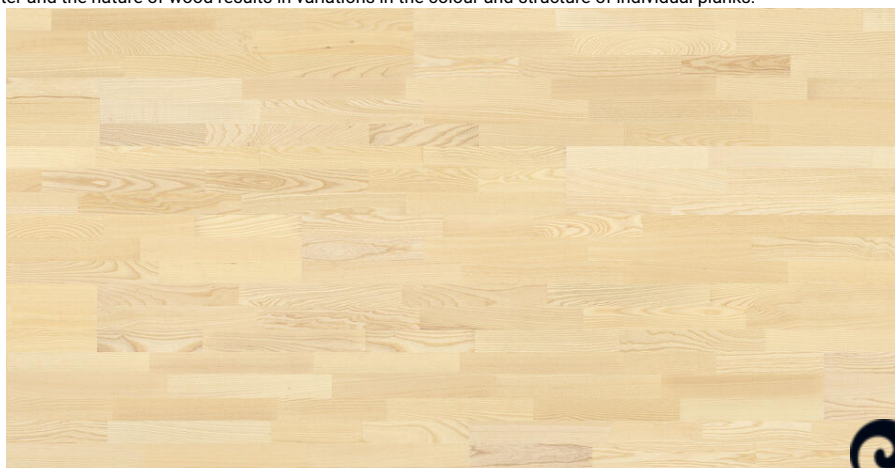

# Shade - OAK MISTY GREY TRES (3-strip)

## Datasheet


| Product Information                                  | Tarkett Value                               |
|------------------------------------------------------|---------------------------------------------|
| Material code                                        | 8723040                                     |
| Format                                               | Plank 194 x 2281 mm                         |
| Pattern                                              | (3-strip)                                   |
| Surface treatment                                    | Proteco Natura                              |
| Surface effect                                       | None                                        |
| Wear layer thickness                                 | 2,5 mm                                      |
| Total thickness                                      | 13 mm                                       |
| Items per box                                        | 6                                           |
| Surface per box                                      | 2,66 m <sup>2</sup>                         |
| Surface per pallet                                   | 106,4 m <sup>2</sup>                        |
| Net weight                                           | 6,7 kg                                      |
| Character                                            | Calm                                        |
| Latin Name                                           | Quercus Robur & Quercus Petraea             |
| Declaration of Performance #                         | 0020-0104                                   |
| EPD Number                                           | S-P-01509                                   |
| Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3) | -7,49 kg CO <sub>2</sub> eq /m <sup>2</sup> |
| LRV - overall average / Standard deviation           | 32 / 3                                      |

Due to the nature of the material this table shows typical values.

| Characteristics & Technical Performance                                          | Tarkett Value                            | Norm                          |
|----------------------------------------------------------------------------------|------------------------------------------|-------------------------------|
| Reaction to fire                                                                 | Dfl-s1                                   | EN 14342 - Table 1            |
| Formaldehyde emission                                                            | E1                                       | EN 14342                      |
| Brinell hardness (average value)                                                 | 3.7                                      | (BHN) EN 1534                 |
| Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II | $\geq 17$                                | EN ISO 10140-3 / EN ISO 717-2 |
| Thermal insulation value : board only (RT m2 K/W)                                | 0.101                                    | EN ISO 10456:2007             |
| Thermal insulation value : with rag felt (RT m2 K/W)                             | 0.121                                    | EN ISO 10456:2007             |
| Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)               | 0.141                                    | EN ISO 10456:2007             |
| Thermal conductivity (W/m K)                                                     | 0.104                                    | EN 12664 / EN 14342:2013      |
| Slip Resistance                                                                  | Low risk of slip                         | BS 7976-2                     |
| Construction                                                                     | Softwood Veneer and Lamella core 3-layer |                               |



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

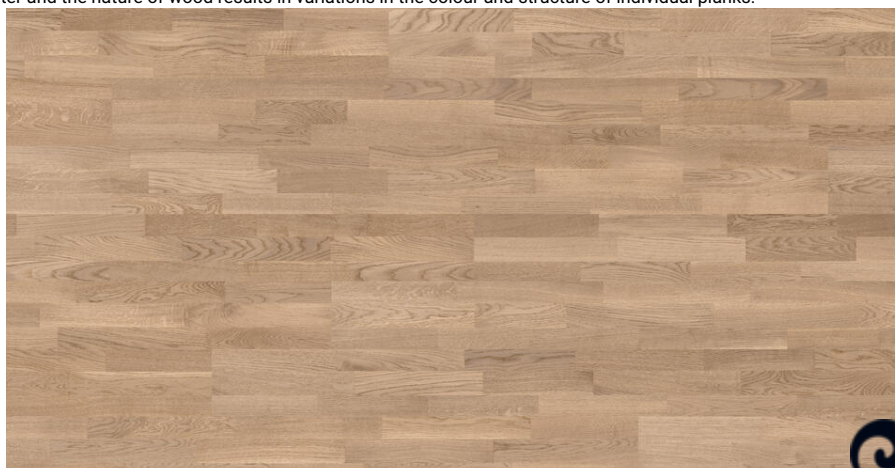

# Shade - OAK ALMOND TRES (3-strip)

## Datasheet


| Product Information                                  | Tarkett Value                               |
|------------------------------------------------------|---------------------------------------------|
| Material code                                        | 8723042                                     |
| Format                                               | Plank 194 x 2281 mm                         |
| Pattern                                              | (3-strip)                                   |
| Surface treatment                                    | Proteco Natura                              |
| Surface effect                                       | Brushed                                     |
| Wear layer thickness                                 | 2,5 mm                                      |
| Total thickness                                      | 13 mm                                       |
| Items per box                                        | 6                                           |
| Surface per box                                      | 2,66 m <sup>2</sup>                         |
| Surface per pallet                                   | 106,4 m <sup>2</sup>                        |
| Net weight                                           | 6,7 kg                                      |
| Character                                            | Calm                                        |
| Latin Name                                           | Quercus Robur & Quercus Petraea             |
| Declaration of Performance #                         | 0020-0104                                   |
| EPD Number                                           | S-P-01509                                   |
| Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3) | -7,49 kg CO <sub>2</sub> eq /m <sup>2</sup> |
| LRV - overall average / Standard deviation           | 21 / 2                                      |

Due to the nature of the material this table shows typical values.

| Characteristics & Technical Performance                                          | Tarkett Value                            | Norm                          |
|----------------------------------------------------------------------------------|------------------------------------------|-------------------------------|
| Reaction to fire                                                                 | Dfl-s1                                   | EN 14342 - Table 1            |
| Formaldehyde emission                                                            | E1                                       | EN 14342                      |
| Brinell hardness (average value)                                                 | 3.7                                      | (BHN) EN 1534                 |
| Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II | $\geq 17$                                | EN ISO 10140-3 / EN ISO 717-2 |
| Thermal insulation value : board only (RT m2 K/W)                                | 0.101                                    | EN ISO 10456:2007             |
| Thermal insulation value : with rag felt (RT m2 K/W)                             | 0.121                                    | EN ISO 10456:2007             |
| Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)               | 0.141                                    | EN ISO 10456:2007             |
| Thermal conductivity (W/m K)                                                     | 0.104                                    | EN 12664 / EN 14342:2013      |
| Slip Resistance                                                                  | Low risk of slip                         | BS 7976-2                     |
| Construction                                                                     | Softwood Veneer and Lamella core 3-layer |                               |



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

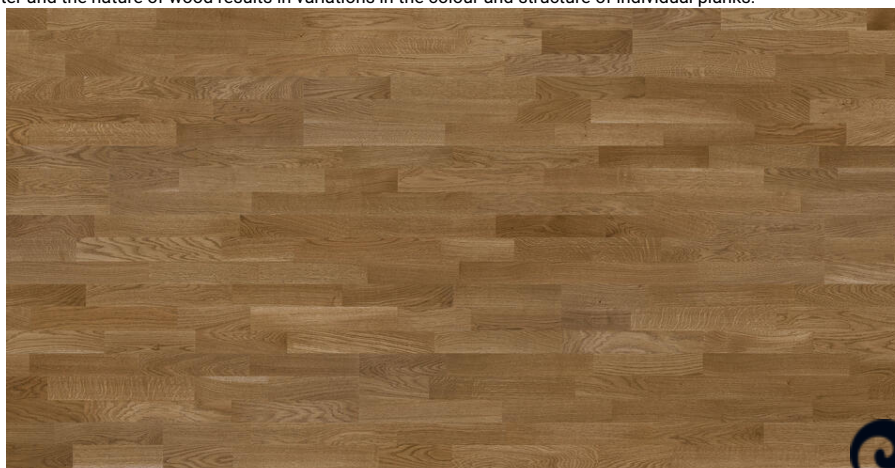

# Shade - OAK CREAM WHITE TRES (3-strip)

## Datasheet

| Product Information                                  | Tarkett Value                               |
|------------------------------------------------------|---------------------------------------------|
| Material code                                        | 8723925                                     |
| Format                                               | Plank 194 x 2281 mm                         |
| Pattern                                              | (3-strip)                                   |
| Surface treatment                                    | Proteco Natura                              |
| Surface effect                                       | None                                        |
| Wear layer thickness                                 | 2,5 mm                                      |
| Total thickness                                      | 13 mm                                       |
| Items per box                                        | 6                                           |
| Surface per box                                      | 2,66 m <sup>2</sup>                         |
| Surface per pallet                                   | 106,4 m <sup>2</sup>                        |
| Net weight                                           | 6,7 kg                                      |
| Character                                            | Lively                                      |
| Latin Name                                           | Quercus Robur & Quercus Petraea             |
| Declaration of Performance #                         | 0020-0104                                   |
| EPD Number                                           | S-P-01509                                   |
| Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3) | -7,49 kg CO <sub>2</sub> eq /m <sup>2</sup> |
| LRV - overall average / Standard deviation           | 42 / 10                                     |

Due to the nature of the material this table shows typical values.

| Characteristics & Technical Performance                                          | Tarkett Value                            | Norm                          |
|----------------------------------------------------------------------------------|------------------------------------------|-------------------------------|
| Reaction to fire                                                                 | Dfl-s1                                   | EN 14342 - Table 1            |
| Formaldehyde emission                                                            | E1                                       | EN 14342                      |
| Brinell hardness (average value)                                                 | 3.7                                      | (BHN) EN 1534                 |
| Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II | $\geq 17$                                | EN ISO 10140-3 / EN ISO 717-2 |
| Thermal insulation value : board only (RT m <sup>2</sup> K/W)                    | 0.101                                    | EN ISO 10456:2007             |
| Thermal insulation value : with rag felt (RT m <sup>2</sup> K/W)                 | 0.121                                    | EN ISO 10456:2007             |
| Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m <sup>2</sup> K/W)   | 0.141                                    | EN ISO 10456:2007             |
| Thermal conductivity (W/m K)                                                     | 0.104                                    | EN 12664 / EN 14342:2013      |
| Slip Resistance                                                                  | Low risk of slip                         | BS 7976-2                     |
| Construction                                                                     | Softwood Veneer and Lamella core 3-layer |                               |



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.



# Shade - OAK COTTON WHITE TRES (3-strip)

## Datasheet


| Product Information                                  | Tarkett Value                               |
|------------------------------------------------------|---------------------------------------------|
| Material code                                        | 8723926                                     |
| Format                                               | Plank 194 x 2281 mm                         |
| Pattern                                              | (3-strip)                                   |
| Surface treatment                                    | Proteco Natura                              |
| Surface effect                                       | None                                        |
| Wear layer thickness                                 | 2,5 mm                                      |
| Total thickness                                      | 13 mm                                       |
| Items per box                                        | 6                                           |
| Surface per box                                      | 2,66 m <sup>2</sup>                         |
| Surface per pallet                                   | 106,4 m <sup>2</sup>                        |
| Net weight                                           | 6,7 kg                                      |
| Character                                            | Calm                                        |
| Latin Name                                           | Quercus Robur & Quercus Petraea             |
| Declaration of Performance #                         | 0020-0104                                   |
| EPD Number                                           | S-P-01509                                   |
| Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3) | -7,49 kg CO <sub>2</sub> eq /m <sup>2</sup> |
| LRV - overall average / Standard deviation           | 46 / 3                                      |

Due to the nature of the material this table shows typical values.

| Characteristics & Technical Performance                                          | Tarkett Value                            | Norm                          |
|----------------------------------------------------------------------------------|------------------------------------------|-------------------------------|
| Reaction to fire                                                                 | Dfl-s1                                   | EN 14342 - Table 1            |
| Formaldehyde emission                                                            | E1                                       | EN 14342                      |
| Brinell hardness (average value)                                                 | 3.7                                      | (BHN) EN 1534                 |
| Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II | $\geq 17$                                | EN ISO 10140-3 / EN ISO 717-2 |
| Thermal insulation value : board only (RT m2 K/W)                                | 0.101                                    | EN ISO 10456:2007             |
| Thermal insulation value : with rag felt (RT m2 K/W)                             | 0.121                                    | EN ISO 10456:2007             |
| Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)               | 0.141                                    | EN ISO 10456:2007             |
| Thermal conductivity (W/m K)                                                     | 0.104                                    | EN 12664 / EN 14342:2013      |
| Slip Resistance                                                                  | Low risk of slip                         | BS 7976-2                     |
| Construction                                                                     | Softwood Veneer and Lamella core 3-layer |                               |



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

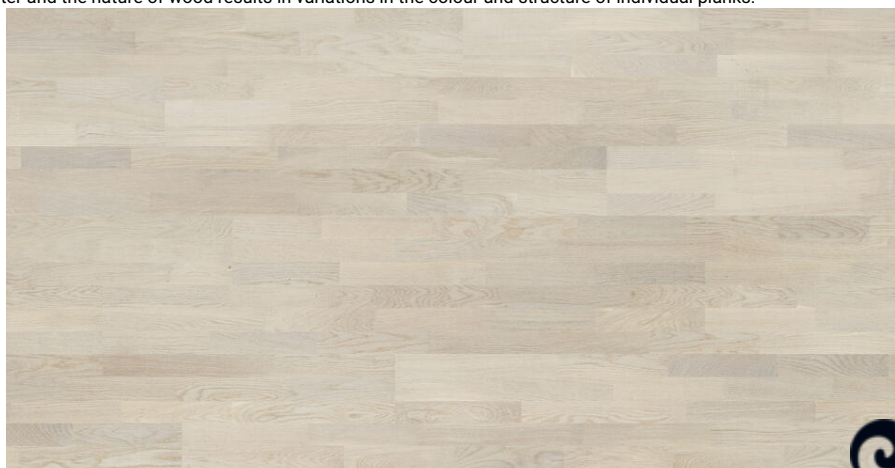

# Shade - OAK SOFT BEIGE TRES (3-strip)

## Datasheet


| Product Information                                  | Tarkett Value                               |
|------------------------------------------------------|---------------------------------------------|
| Material code                                        | 8723927                                     |
| Format                                               | Plank 194 x 2281 mm                         |
| Pattern                                              | (3-strip)                                   |
| Surface treatment                                    | Proteco Natura                              |
| Surface effect                                       | Brushed                                     |
| Wear layer thickness                                 | 2,5 mm                                      |
| Total thickness                                      | 13 mm                                       |
| Items per box                                        | 6                                           |
| Surface per box                                      | 2,66 m <sup>2</sup>                         |
| Surface per pallet                                   | 106,4 m <sup>2</sup>                        |
| Net weight                                           | 7,3 kg                                      |
| Character                                            | Lively                                      |
| Latin Name                                           | Quercus Robur & Quercus Petraea             |
| Declaration of Performance #                         | 0190-0103                                   |
| EPD Number                                           | S-P-01509                                   |
| Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3) | -7,49 kg CO <sub>2</sub> eq /m <sup>2</sup> |
| LRV - overall average / Standard deviation           | 31 / 3                                      |

Due to the nature of the material this table shows typical values.

| Characteristics & Technical Performance                                          | Tarkett Value                            | Norm                          |
|----------------------------------------------------------------------------------|------------------------------------------|-------------------------------|
| Reaction to fire                                                                 | Dfl-s1                                   | EN 14342 - Table 1            |
| Formaldehyde emission                                                            | E1                                       | EN 14342                      |
| Brinell hardness (average value)                                                 | 3.7                                      | (BHN) EN 1534                 |
| Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II | $\geq 17$                                | EN ISO 10140-3 / EN ISO 717-2 |
| Thermal insulation value : board only (RT m2 K/W)                                | 0.101                                    | EN ISO 10456:2007             |
| Thermal insulation value : with rag felt (RT m2 K/W)                             | 0.121                                    | EN ISO 10456:2007             |
| Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)               | 0.141                                    | EN ISO 10456:2007             |
| Thermal conductivity (W/m K)                                                     | 0.104                                    | EN 12664 / EN 14342:2013      |
| Slip Resistance                                                                  | Low risk of slip                         | BS 7976-2                     |
| Construction                                                                     | Softwood Veneer and Lamella core 3-layer |                               |



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

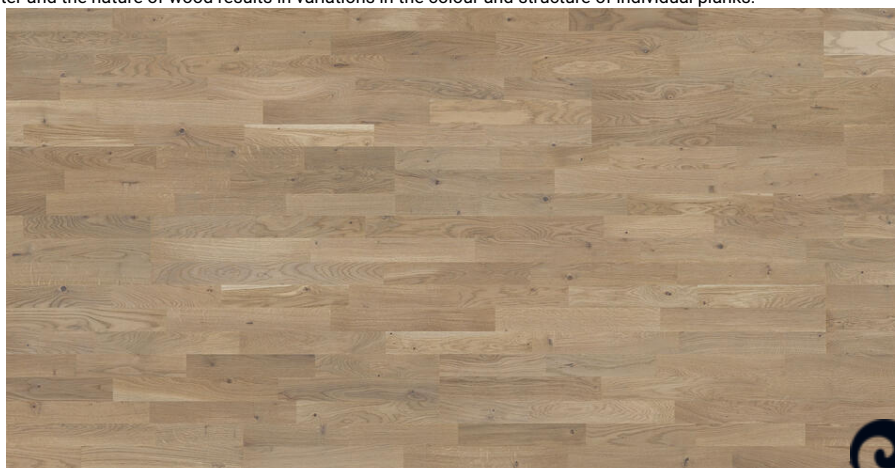

# Shade - OAK COTTON WHITE DUOPLANK (2-strip)

## Datasheet


| Product Information                                  | Tarkett Value                               |
|------------------------------------------------------|---------------------------------------------|
| Material code                                        | 8727004                                     |
| Format                                               | Plank 194 x 2281 mm                         |
| Pattern                                              | (2-strip)                                   |
| Surface treatment                                    | Proteco Natura                              |
| Surface effect                                       | None                                        |
| Wear layer thickness                                 | 2,5 mm                                      |
| Total thickness                                      | 13 mm                                       |
| Items per box                                        | 6                                           |
| Surface per box                                      | 2,66 m <sup>2</sup>                         |
| Surface per pallet                                   | 106,4 m <sup>2</sup>                        |
| Net weight                                           | 6,7 kg                                      |
| Character                                            | Calm                                        |
| Latin Name                                           | Quercus Robur & Quercus Petraea             |
| Declaration of Performance #                         | 0020-0104                                   |
| EPD Number                                           | S-P-01509                                   |
| Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3) | -7,49 kg CO <sub>2</sub> eq /m <sup>2</sup> |
| LRV - overall average / Standard deviation           | 48 / 2                                      |

Due to the nature of the material this table shows typical values.

| Characteristics & Technical Performance                                          | Tarkett Value                            | Norm                          |
|----------------------------------------------------------------------------------|------------------------------------------|-------------------------------|
| Reaction to fire                                                                 | Dfl-s1                                   | EN 14342 - Table 1            |
| Formaldehyde emission                                                            | E1                                       | EN 14342                      |
| Brinell hardness (average value)                                                 | 3.7                                      | (BHN) EN 1534                 |
| Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II | $\geq 17$                                | EN ISO 10140-3 / EN ISO 717-2 |
| Thermal insulation value : board only (RT m2 K/W)                                | 0.101                                    | EN ISO 10456:2007             |
| Thermal insulation value : with rag felt (RT m2 K/W)                             | 0.121                                    | EN ISO 10456:2007             |
| Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)               | 0.141                                    | EN ISO 10456:2007             |
| Thermal conductivity (W/m K)                                                     | 0.104                                    | EN 12664 / EN 14342:2013      |
| Slip Resistance                                                                  | Low risk of slip                         | BS 7976-2                     |
| Construction                                                                     | Softwood Veneer and Lamella core 3-layer |                               |



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

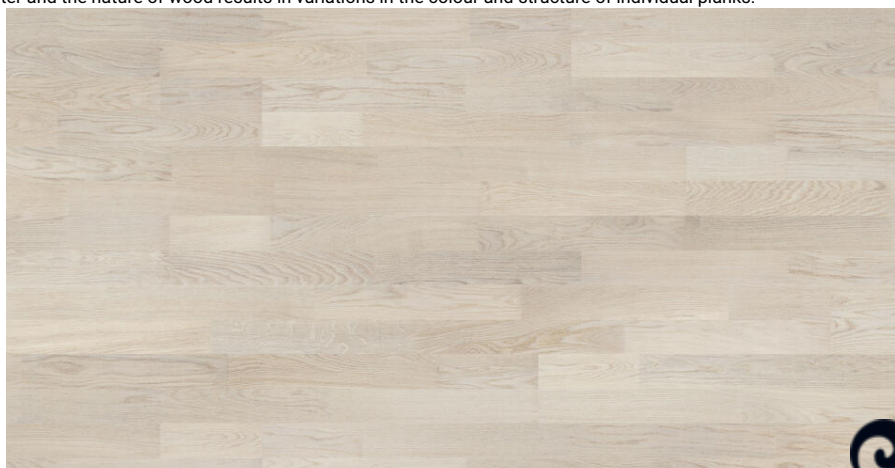

# Shade - OAK ESSENCE DUOPLANK (2-strip)

## Datasheet


| Product Information                                  | Tarkett Value                               |
|------------------------------------------------------|---------------------------------------------|
| Material code                                        | 8727009                                     |
| Format                                               | Plank 194 x 2281 mm                         |
| Pattern                                              | (2-strip)                                   |
| Surface treatment                                    | Proteco Natura                              |
| Surface effect                                       | Brushed                                     |
| Wear layer thickness                                 | 2,5 mm                                      |
| Total thickness                                      | 13 mm                                       |
| Items per box                                        | 6                                           |
| Surface per box                                      | 2,66 m <sup>2</sup>                         |
| Surface per pallet                                   | 106,4 m <sup>2</sup>                        |
| Net weight                                           | 6,7 kg                                      |
| Character                                            | Calm                                        |
| Latin Name                                           | Quercus Robur & Quercus Petraea             |
| Declaration of Performance #                         | 0020-0104                                   |
| EPD Number                                           | S-P-01509                                   |
| Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3) | -7,49 kg CO <sub>2</sub> eq /m <sup>2</sup> |
| LRV - overall average / Standard deviation           | 31 / 4                                      |

Due to the nature of the material this table shows typical values.

| Characteristics & Technical Performance                                          | Tarkett Value                            | Norm                          |
|----------------------------------------------------------------------------------|------------------------------------------|-------------------------------|
| Reaction to fire                                                                 | Dfl-s1                                   | EN 14342 - Table 1            |
| Formaldehyde emission                                                            | E1                                       | EN 14342                      |
| Brinell hardness (average value)                                                 | 3.7                                      | (BHN) EN 1534                 |
| Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II | $\geq 17$                                | EN ISO 10140-3 / EN ISO 717-2 |
| Thermal insulation value : board only (RT m <sup>2</sup> K/W)                    | 0.101                                    | EN ISO 10456:2007             |
| Thermal insulation value : with rag felt (RT m <sup>2</sup> K/W)                 | 0.121                                    | EN ISO 10456:2007             |
| Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m <sup>2</sup> K/W)   | 0.141                                    | EN ISO 10456:2007             |
| Thermal conductivity (W/m K)                                                     | 0.104                                    | EN 12664 / EN 14342:2013      |
| Slip Resistance                                                                  | Low risk of slip                         | BS 7976-2                     |
| Construction                                                                     | Softwood Veneer and Lamella core 3-layer |                               |



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

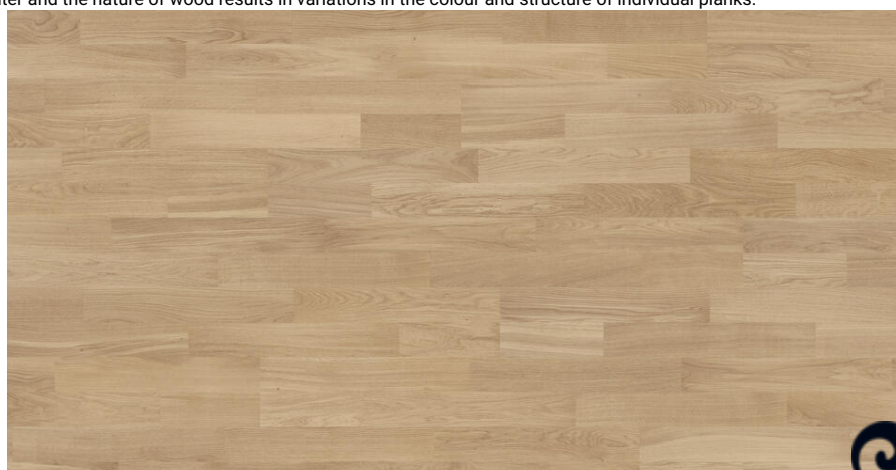

# Shade - OAK ITALIAN BROWN DUOPLANK (2-strip)

## Datasheet


| Product Information                                  | Tarkett Value                               |
|------------------------------------------------------|---------------------------------------------|
| Material code                                        | 8727013                                     |
| Format                                               | Plank 194 x 2281 mm                         |
| Pattern                                              | (2-strip)                                   |
| Surface treatment                                    | Proteco Natura                              |
| Surface effect                                       | Brushed                                     |
| Wear layer thickness                                 | 2,5 mm                                      |
| Total thickness                                      | 13 mm                                       |
| Items per box                                        | 6                                           |
| Surface per box                                      | 2,66 m <sup>2</sup>                         |
| Surface per pallet                                   | 106,4 m <sup>2</sup>                        |
| Net weight                                           | 6,7 kg                                      |
| Character                                            | Lively                                      |
| Latin Name                                           | Quercus Robur & Quercus Petraea             |
| Declaration of Performance #                         | 0020-0104                                   |
| EPD Number                                           | S-P-01509                                   |
| Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3) | -7,49 kg CO <sub>2</sub> eq /m <sup>2</sup> |
| LRV - overall average / Standard deviation           | 13 / 3                                      |

Due to the nature of the material this table shows typical values.

| Characteristics & Technical Performance                                          | Tarkett Value                            | Norm                          |
|----------------------------------------------------------------------------------|------------------------------------------|-------------------------------|
| Reaction to fire                                                                 | Dfl-s1                                   | EN 14342 - Table 1            |
| Formaldehyde emission                                                            | E1                                       | EN 14342                      |
| Brinell hardness (average value)                                                 | 3.7                                      | (BHN) EN 1534                 |
| Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II | $\geq 17$                                | EN ISO 10140-3 / EN ISO 717-2 |
| Thermal insulation value : board only (RT m <sup>2</sup> K/W)                    | 0.101                                    | EN ISO 10456:2007             |
| Thermal insulation value : with rag felt (RT m <sup>2</sup> K/W)                 | 0.121                                    | EN ISO 10456:2007             |
| Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m <sup>2</sup> K/W)   | 0.141                                    | EN ISO 10456:2007             |
| Thermal conductivity (W/m K)                                                     | 0.104                                    | EN 12664 / EN 14342:2013      |
| Slip Resistance                                                                  | Low risk of slip                         | BS 7976-2                     |
| Construction                                                                     | Softwood Veneer and Lamella core 3-layer |                               |



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

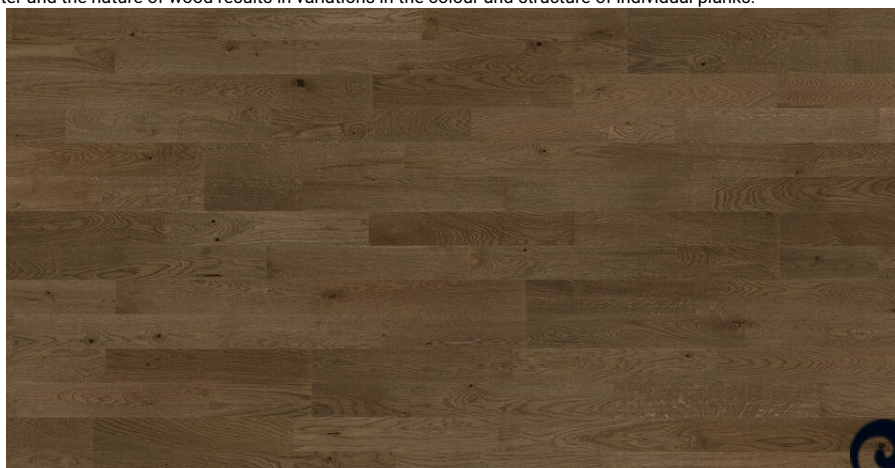

# Shade - OAK CREAM WHITE DUOPLANK (2-strip)

## Datasheet

| Product Information                                  | Tarkett Value                               |
|------------------------------------------------------|---------------------------------------------|
| Material code                                        | 8727901                                     |
| Format                                               | Plank 194 x 2281 mm                         |
| Pattern                                              | (2-strip)                                   |
| Surface treatment                                    | Proteco Natura                              |
| Surface effect                                       | None                                        |
| Wear layer thickness                                 | 2,5 mm                                      |
| Total thickness                                      | 13 mm                                       |
| Items per box                                        | 6                                           |
| Surface per box                                      | 2,66 m <sup>2</sup>                         |
| Surface per pallet                                   | 106,4 m <sup>2</sup>                        |
| Net weight                                           | 6,7 kg                                      |
| Character                                            | Lively                                      |
| Latin Name                                           | Quercus Robur & Quercus Petraea             |
| Declaration of Performance #                         | 0020-0104                                   |
| EPD Number                                           | S-P-01509                                   |
| Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3) | -7,49 kg CO <sub>2</sub> eq /m <sup>2</sup> |
| LRV - overall average / Standard deviation           | 38 / 4                                      |

Due to the nature of the material this table shows typical values.

| Characteristics & Technical Performance                                          | Tarkett Value                            | Norm                          |
|----------------------------------------------------------------------------------|------------------------------------------|-------------------------------|
| Reaction to fire                                                                 | Dfl-s1                                   | EN 14342 - Table 1            |
| Formaldehyde emission                                                            | E1                                       | EN 14342                      |
| Brinell hardness (average value)                                                 | 3.7                                      | (BHN) EN 1534                 |
| Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II | $\geq 17$                                | EN ISO 10140-3 / EN ISO 717-2 |
| Thermal insulation value : board only (RT m <sup>2</sup> K/W)                    | 0.101                                    | EN ISO 10456:2007             |
| Thermal insulation value : with rag felt (RT m <sup>2</sup> K/W)                 | 0.121                                    | EN ISO 10456:2007             |
| Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m <sup>2</sup> K/W)   | 0.141                                    | EN ISO 10456:2007             |
| Thermal conductivity (W/m K)                                                     | 0.104                                    | EN 12664 / EN 14342:2013      |
| Slip Resistance                                                                  | Low risk of slip                         | BS 7976-2                     |
| Construction                                                                     | Softwood Veneer and Lamella core 3-layer |                               |



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

