

# Professional (13-14 mm)

## Datasheet



### INSTALLATION

- Installation method: 2-lock for floating or glue down
- Installation instruction: Download from [www.tarkett.com](http://www.tarkett.com). Contact your supplier for more details
- Underfloor heating compatible. Maximum floor surface temperature 27°C with self-regulating underfloor heating system
- Start & Stop: Shorter lengths of planks included in approx. 1 pack per 20 m²

### MAINTENANCE

These Tarkett wooden floors have a Proteco surface treatment and therefore a strong protection against normal wear, abrasion, scratches and stains. Some floors will require more frequent maintenance for increased life span. Generally these products are light coloured floors and hardwax oiled floors, particularly with brushed surface and/or highlighted details.

Always make sure to follow the most recently updated maintenance instructions on [www.tarkett.com](http://www.tarkett.com).

### RECOMMENDED ACCESSORIES

- Installation: Tarkofoam II / Tarkoflex II / Installation kit
- Aesthetics: Skirting, Transition moulding, Pipe covers
- Care & maintenance: Tarkoclean for lacquered floors, Refresher for lacquered floors

---

See more alternatives and the complete range of accessories @ [www.tarkett.com](http://www.tarkett.com)

---

| Product Name                                                | Product Code | Page               |
|-------------------------------------------------------------|--------------|--------------------|
| Professional (13-14 mm) - OAK NATURE TRES (3-strip)         | 7870077      | <a href="#">3</a>  |
| Professional (13-14 mm) - OAK NATURE TRES (3-strip)         | 7870078      | <a href="#">4</a>  |
| Professional (13-14 mm) - OAK NATURE WHITE TRES (3-strip)   | 7870079      | <a href="#">5</a>  |
| Professional (13-14 mm) - OAK ROBUST TRES (3-strip)         | 7870080      | <a href="#">6</a>  |
| Professional (13-14 mm) - OAK ROBUST WHITE TRES (3-strip)   | 7870081      | <a href="#">7</a>  |
| Professional (13-14 mm) - ASH CONTRAST TRES (3-strip)       | 7965016      | <a href="#">8</a>  |
| Professional (13-14 mm) - ASH CONTRAST WHITE TRES (3-strip) | 7965017      | <a href="#">9</a>  |
| Professional (13-14 mm) - ASH NATURE TRES (3-strip)         | 7965018      | <a href="#">10</a> |
| Professional (13-14 mm) - ASH NATURE WHITE TRES (3-strip)   | 7965019      | <a href="#">11</a> |
| Professional (13-14 mm) - OAK NATURE TRES 2027 (3-strip)    | 8721007      | <a href="#">12</a> |
| Professional (13-14 mm) - OAK NATURE TRES 2027 (3-strip)    | 8722014      | <a href="#">13</a> |
| Professional (13-14 mm) - OAK NATURE TRES 2027 (3-strip)    | 8722015      | <a href="#">14</a> |

# Professional (13-14 mm) - OAK NATURE TRES (3-strip)

## Datasheet

| Product Information                                  | Tarkett Value                               |
|------------------------------------------------------|---------------------------------------------|
| Material code                                        | 7870077                                     |
| Format                                               | Plank 194 x 2281 mm                         |
| Pattern                                              | (3-strip)                                   |
| Surface treatment                                    | Proteco Lacquer                             |
| Surface effect                                       | None                                        |
| Wear layer thickness                                 | 3,5 mm                                      |
| Total thickness                                      | 14 mm                                       |
| Items per box                                        | 6                                           |
| Surface per box                                      | 2,66 m <sup>2</sup>                         |
| Surface per pallet                                   | 93,1 m <sup>2</sup>                         |
| Net weight                                           | 7,3 kg                                      |
| Character                                            | Calm                                        |
| Latin Name                                           | Quercus Robur & Quercus Petraea             |
| Declaration of Performance #                         | 0020-0106                                   |
| EPD Number                                           | S-P-01509                                   |
| Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3) | -7,49 kg CO <sub>2</sub> eq /m <sup>2</sup> |
| LRV - overall average / Standard deviation           | 27 / 4                                      |

Due to the nature of the material this table shows typical values.

| Characteristics & Technical Performance                                          | Tarkett Value                            | Norm                          |
|----------------------------------------------------------------------------------|------------------------------------------|-------------------------------|
| Reaction to fire                                                                 | Dfl-s1                                   | EN 14342 - Table 1            |
| Formaldehyde emission                                                            | E1                                       | EN 14342                      |
| Brinell hardness (average value)                                                 | 3.7                                      | (BHN) EN 1534                 |
| Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II | $\geq 17$                                | EN ISO 10140-3 / EN ISO 717-2 |
| Thermal insulation value : board only (RT m <sup>2</sup> K/W)                    | 0.101                                    | EN ISO 10456:2007             |
| Thermal insulation value : with rag felt (RT m <sup>2</sup> K/W)                 | 0.121                                    | EN ISO 10456:2007             |
| Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m <sup>2</sup> K/W)   | 0.141                                    | EN ISO 10456:2007             |
| Thermal conductivity (W/m K)                                                     | 0.11                                     | EN 12664 / EN 14342:2013      |
| Taber Abraser/Lacquer's wear resistance                                          | 4000                                     | EN 13696                      |
| Slip Resistance                                                                  | Low risk of slip                         | BS 7976-2                     |
| Construction                                                                     | Softwood Veneer and Lamella core 3-layer |                               |



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.



# Professional (13-14 mm) - OAK NATURE TRES (3-strip)

## Datasheet

| Product Information                                  | Tarkett Value                               |
|------------------------------------------------------|---------------------------------------------|
| Material code                                        | 7870078                                     |
| Format                                               | Plank 194 x 2281 mm                         |
| Pattern                                              | (3-strip)                                   |
| Surface treatment                                    | Proteco Natura                              |
| Surface effect                                       | None                                        |
| Wear layer thickness                                 | 3,5 mm                                      |
| Total thickness                                      | 14 mm                                       |
| Items per box                                        | 6                                           |
| Surface per box                                      | 2,66 m <sup>2</sup>                         |
| Surface per pallet                                   | 93,1 m <sup>2</sup>                         |
| Net weight                                           | 7,3 kg                                      |
| Character                                            | Calm                                        |
| Latin Name                                           | Quercus Robur & Quercus Petraea             |
| Declaration of Performance #                         | 0020-0106                                   |
| EPD Number                                           | S-P-01509                                   |
| Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3) | -7,49 kg CO <sub>2</sub> eq /m <sup>2</sup> |
| LRV - overall average / Standard deviation           | 26 / 4                                      |

Due to the nature of the material this table shows typical values.

| Characteristics & Technical Performance                                          | Tarkett Value                            | Norm                          |
|----------------------------------------------------------------------------------|------------------------------------------|-------------------------------|
| Reaction to fire                                                                 | Dfl-s1                                   | EN 14342 - Table 1            |
| Formaldehyde emission                                                            | E1                                       | EN 14342                      |
| Brinell hardness (average value)                                                 | 3.7                                      | (BHN) EN 1534                 |
| Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II | $\geq 17$                                | EN ISO 10140-3 / EN ISO 717-2 |
| Thermal insulation value : board only (RT m <sup>2</sup> K/W)                    | 0.101                                    | EN ISO 10456:2007             |
| Thermal insulation value : with rag felt (RT m <sup>2</sup> K/W)                 | 0.121                                    | EN ISO 10456:2007             |
| Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m <sup>2</sup> K/W)   | 0.141                                    | EN ISO 10456:2007             |
| Thermal conductivity (W/m K)                                                     | 0.11                                     | EN 12664 / EN 14342:2013      |
| Taber Abraser/Lacquer's wear resistance                                          | 3500                                     | EN 13696                      |
| Slip Resistance                                                                  | Low risk of slip                         | BS 7976-2                     |
| Construction                                                                     | Softwood Veneer and Lamella core 3-layer |                               |



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.



# Professional (13-14 mm) - OAK NATURE WHITE TRES (3-strip)

## Datasheet


| Product Information                                  | Tarkett Value                               |
|------------------------------------------------------|---------------------------------------------|
| Material code                                        | 7870079                                     |
| Format                                               | Plank 194 x 2281 mm                         |
| Pattern                                              | (3-strip)                                   |
| Surface treatment                                    | Proteco Natura                              |
| Surface effect                                       | None                                        |
| Wear layer thickness                                 | 3,5 mm                                      |
| Total thickness                                      | 14 mm                                       |
| Items per box                                        | 6                                           |
| Surface per box                                      | 2,66 m <sup>2</sup>                         |
| Surface per pallet                                   | 93,1 m <sup>2</sup>                         |
| Net weight                                           | 7,3 kg                                      |
| Character                                            | Calm                                        |
| Latin Name                                           | Quercus Robur & Quercus Petraea             |
| Declaration of Performance #                         | 0020-0106                                   |
| EPD Number                                           | S-P-01509                                   |
| Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3) | -7,49 kg CO <sub>2</sub> eq /m <sup>2</sup> |
| LRV - overall average / Standard deviation           | 39 / 5                                      |

Due to the nature of the material this table shows typical values.

| Characteristics & Technical Performance                                          | Tarkett Value                            | Norm                          |
|----------------------------------------------------------------------------------|------------------------------------------|-------------------------------|
| Reaction to fire                                                                 | Dfl-s1                                   | EN 14342 - Table 1            |
| Formaldehyde emission                                                            | E1                                       | EN 14342                      |
| Brinell hardness (average value)                                                 | 3.7                                      | (BHN) EN 1534                 |
| Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II | $\geq 17$                                | EN ISO 10140-3 / EN ISO 717-2 |
| Thermal insulation value : board only (RT m <sup>2</sup> K/W)                    | 0.101                                    | EN ISO 10456:2007             |
| Thermal insulation value : with rag felt (RT m <sup>2</sup> K/W)                 | 0.121                                    | EN ISO 10456:2007             |
| Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m <sup>2</sup> K/W)   | 0.141                                    | EN ISO 10456:2007             |
| Thermal conductivity (W/m K)                                                     | 0.11                                     | EN 12664 / EN 14342:2013      |
| Slip Resistance                                                                  | Low risk of slip                         | BS 7976-2                     |
| Construction                                                                     | Softwood Veneer and Lamella core 3-layer |                               |



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

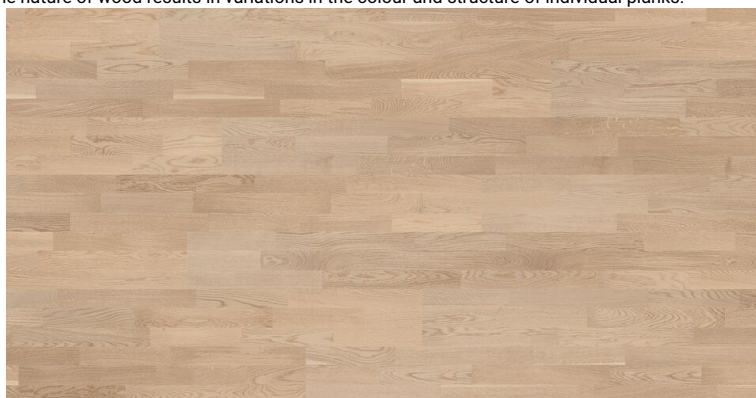

# Professional (13-14 mm) - OAK ROBUST TRES (3-strip)

## Datasheet


| Product Information                                  | Tarkett Value                               |
|------------------------------------------------------|---------------------------------------------|
| Material code                                        | 7870080                                     |
| Format                                               | Plank 194 x 2281 mm                         |
| Pattern                                              | (3-strip)                                   |
| Surface treatment                                    | Proteco Natura                              |
| Surface effect                                       | None                                        |
| Wear layer thickness                                 | 3,5 mm                                      |
| Total thickness                                      | 14 mm                                       |
| Items per box                                        | 6                                           |
| Surface per box                                      | 2,66 m <sup>2</sup>                         |
| Surface per pallet                                   | 93,1 m <sup>2</sup>                         |
| Net weight                                           | 7,3 kg                                      |
| Character                                            | Expressive                                  |
| Latin Name                                           | Quercus Robur & Quercus Petraea             |
| Declaration of Performance #                         | 0020-0106                                   |
| EPD Number                                           | S-P-01509                                   |
| Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3) | -7,49 kg CO <sub>2</sub> eq /m <sup>2</sup> |
| LRV - overall average / Standard deviation           | 33 / 4                                      |

Due to the nature of the material this table shows typical values.

| Characteristics & Technical Performance                                          | Tarkett Value                            | Norm                          |
|----------------------------------------------------------------------------------|------------------------------------------|-------------------------------|
| Reaction to fire                                                                 | Dfl-s1                                   | EN 14342 - Table 1            |
| Formaldehyde emission                                                            | E1                                       | EN 14342                      |
| Brinell hardness (average value)                                                 | 3.7                                      | (BHN) EN 1534                 |
| Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II | $\geq 17$                                | EN ISO 10140-3 / EN ISO 717-2 |
| Thermal insulation value : board only (RT m <sup>2</sup> K/W)                    | 0.101                                    | EN ISO 10456:2007             |
| Thermal insulation value : with rag felt (RT m <sup>2</sup> K/W)                 | 0.121                                    | EN ISO 10456:2007             |
| Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m <sup>2</sup> K/W)   | 0.141                                    | EN ISO 10456:2007             |
| Thermal conductivity (W/m K)                                                     | 0.11                                     | EN 12664 / EN 14342:2013      |
| Taber Abraser/Lacquer's wear resistance                                          | 3500                                     | EN 13696                      |
| Slip Resistance                                                                  | Low risk of slip                         | BS 7976-2                     |
| Construction                                                                     | Softwood Veneer and Lamella core 3-layer |                               |



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

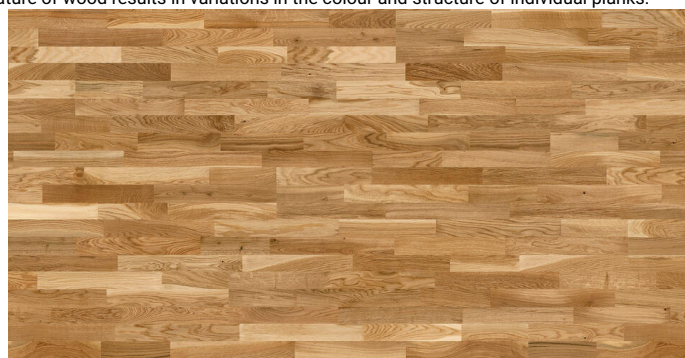

# Professional (13-14 mm) - OAK ROBUST WHITE TRES (3-strip)

## Datasheet


| Product Information                                  | Tarkett Value                               |
|------------------------------------------------------|---------------------------------------------|
| Material code                                        | 7870081                                     |
| Format                                               | Plank 194 x 2281 mm                         |
| Pattern                                              | (3-strip)                                   |
| Surface treatment                                    | Proteco Natura                              |
| Surface effect                                       | None                                        |
| Wear layer thickness                                 | 3,5 mm                                      |
| Total thickness                                      | 14 mm                                       |
| Items per box                                        | 6                                           |
| Surface per box                                      | 2,66 m <sup>2</sup>                         |
| Surface per pallet                                   | 93,1 m <sup>2</sup>                         |
| Net weight                                           | 7,3 kg                                      |
| Character                                            | Lively                                      |
| Latin Name                                           | Quercus Robur & Quercus Petraea             |
| Declaration of Performance #                         | 0020-0106                                   |
| EPD Number                                           | S-P-01509                                   |
| Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3) | -7,49 kg CO <sub>2</sub> eq /m <sup>2</sup> |
| LRV - overall average / Standard deviation           | 42 / 10                                     |

Due to the nature of the material this table shows typical values.

| Characteristics & Technical Performance                                          | Tarkett Value                            | Norm                          |
|----------------------------------------------------------------------------------|------------------------------------------|-------------------------------|
| Reaction to fire                                                                 | Dfl-s1                                   | EN 14342 - Table 1            |
| Formaldehyde emission                                                            | E1                                       | EN 14342                      |
| Brinell hardness (average value)                                                 | 3.7                                      | (BHN) EN 1534                 |
| Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II | $\geq 17$                                | EN ISO 10140-3 / EN ISO 717-2 |
| Thermal insulation value : board only (RT m <sup>2</sup> K/W)                    | 0.101                                    | EN ISO 10456:2007             |
| Thermal insulation value : with rag felt (RT m <sup>2</sup> K/W)                 | 0.121                                    | EN ISO 10456:2007             |
| Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m <sup>2</sup> K/W)   | 0.141                                    | EN ISO 10456:2007             |
| Thermal conductivity (W/m K)                                                     | 0.11                                     | EN 12664 / EN 14342:2013      |
| Slip Resistance                                                                  | Low risk of slip                         | BS 7976-2                     |
| Construction                                                                     | Softwood Veneer and Lamella core 3-layer |                               |



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

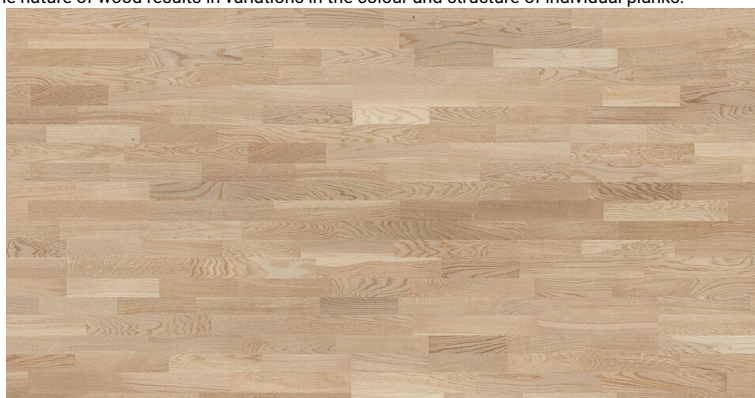

# Professional (13-14 mm) - ASH CONTRAST TRES (3-strip)

## Datasheet


| Product Information                                  | Tarkett Value                               |
|------------------------------------------------------|---------------------------------------------|
| Material code                                        | 7965016                                     |
| Format                                               | Plank 194 x 2281 mm                         |
| Pattern                                              | (3-strip)                                   |
| Surface treatment                                    | Proteco Natura                              |
| Surface effect                                       | None                                        |
| Wear layer thickness                                 | 3,5 mm                                      |
| Total thickness                                      | 14 mm                                       |
| Items per box                                        | 6                                           |
| Surface per box                                      | 2,66 m <sup>2</sup>                         |
| Surface per pallet                                   | 93,1 m <sup>2</sup>                         |
| Net weight                                           | 7,3 kg                                      |
| Character                                            | Expressive                                  |
| Latin Name                                           | Fraxinus Angustifolia                       |
| Declaration of Performance #                         | 0020-0106                                   |
| EPD Number                                           | S-P-01509                                   |
| Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3) | -7,49 kg CO <sub>2</sub> eq /m <sup>2</sup> |
| LRV - overall average / Standard deviation           | 46 / 5                                      |

Due to the nature of the material this table shows typical values.

| Characteristics & Technical Performance                                          | Tarkett Value                            | Norm                          |
|----------------------------------------------------------------------------------|------------------------------------------|-------------------------------|
| Reaction to fire                                                                 | Dfl-s1                                   | EN 14342 - Table 1            |
| Formaldehyde emission                                                            | E1                                       | EN 14342                      |
| Brinell hardness (average value)                                                 | 4                                        | (BHN) EN 1534                 |
| Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II | $\geq 17$                                | EN ISO 10140-3 / EN ISO 717-2 |
| Thermal insulation value : board only (RT m <sup>2</sup> K/W)                    | 0.101                                    | EN ISO 10456:2007             |
| Thermal insulation value : with rag felt (RT m <sup>2</sup> K/W)                 | 0.121                                    | EN ISO 10456:2007             |
| Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m <sup>2</sup> K/W)   | 0.141                                    | EN ISO 10456:2007             |
| Thermal conductivity (W/m K)                                                     | 0.11                                     | EN 12664 / EN 14342:2013      |
| Taber Abraser/Lacquer's wear resistance                                          | 3500                                     | EN 13696                      |
| Slip Resistance                                                                  | Low risk of slip                         | BS 7976-2                     |
| Construction                                                                     | Softwood Veneer and Lamella core 3-layer |                               |



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

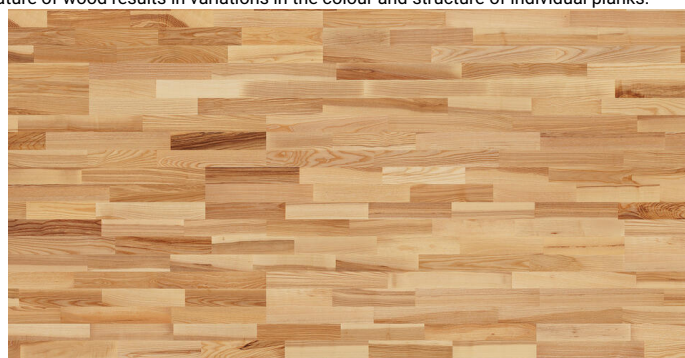

# Professional (13-14 mm) - ASH CONTRAST WHITE TRES (3-strip)

## Datasheet

| Product Information                                  | Tarkett Value                               |
|------------------------------------------------------|---------------------------------------------|
| Material code                                        | 7965017                                     |
| Format                                               | Plank 194 x 2281 mm                         |
| Pattern                                              | (3-strip)                                   |
| Surface treatment                                    | Proteco Natura                              |
| Surface effect                                       | None                                        |
| Wear layer thickness                                 | 3,5 mm                                      |
| Total thickness                                      | 14 mm                                       |
| Items per box                                        | 6                                           |
| Surface per box                                      | 2,66 m <sup>2</sup>                         |
| Surface per pallet                                   | 93,1 m <sup>2</sup>                         |
| Net weight                                           | 7,3 kg                                      |
| Character                                            | Expressive                                  |
| Latin Name                                           | Fraxinus Angustifolia                       |
| Declaration of Performance #                         | 0020-0106                                   |
| EPD Number                                           | S-P-01509                                   |
| Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3) | -7,49 kg CO <sub>2</sub> eq /m <sup>2</sup> |
| LRV - overall average / Standard deviation           | 48 / 6                                      |

Due to the nature of the material this table shows typical values.

| Characteristics & Technical Performance                                          | Tarkett Value                            | Norm                          |
|----------------------------------------------------------------------------------|------------------------------------------|-------------------------------|
| Reaction to fire                                                                 | Dfl-s1                                   | EN 14342 - Table 1            |
| Formaldehyde emission                                                            | E1                                       | EN 14342                      |
| Brinell hardness (average value)                                                 | 4                                        | (BHN) EN 1534                 |
| Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II | $\geq 17$                                | EN ISO 10140-3 / EN ISO 717-2 |
| Thermal insulation value : board only (RT m2 K/W)                                | 0.101                                    | EN ISO 10456:2007             |
| Thermal insulation value : with rag felt (RT m2 K/W)                             | 0.121                                    | EN ISO 10456:2007             |
| Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)               | 0.141                                    | EN ISO 10456:2007             |
| Thermal conductivity (W/m K)                                                     | 0.11                                     | EN 12664 / EN 14342:2013      |
| Slip Resistance                                                                  | Low risk of slip                         | BS 7976-2                     |
| Construction                                                                     | Softwood Veneer and Lamella core 3-layer |                               |



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.



# Professional (13-14 mm) - ASH NATURE TRES (3-strip)

## Datasheet


| Product Information                                  | Tarkett Value                               |
|------------------------------------------------------|---------------------------------------------|
| Material code                                        | 7965018                                     |
| Format                                               | Plank 194 x 2281 mm                         |
| Pattern                                              | (3-strip)                                   |
| Surface treatment                                    | Proteco Natura                              |
| Surface effect                                       | None                                        |
| Wear layer thickness                                 | 3,5 mm                                      |
| Total thickness                                      | 14 mm                                       |
| Items per box                                        | 6                                           |
| Surface per box                                      | 2,66 m <sup>2</sup>                         |
| Surface per pallet                                   | 93,1 m <sup>2</sup>                         |
| Net weight                                           | 7,3 kg                                      |
| Character                                            | Lively                                      |
| Latin Name                                           | Fraxinus Angustifolia                       |
| Declaration of Performance #                         | 0020-0106                                   |
| EPD Number                                           | S-P-01509                                   |
| Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3) | -7,49 kg CO <sub>2</sub> eq /m <sup>2</sup> |
| LRV - overall average / Standard deviation           | 58 / 4                                      |

Due to the nature of the material this table shows typical values.

| Characteristics & Technical Performance                                          | Tarkett Value                            | Norm                          |
|----------------------------------------------------------------------------------|------------------------------------------|-------------------------------|
| Reaction to fire                                                                 | Dfl-s1                                   | EN 14342 - Table 1            |
| Formaldehyde emission                                                            | E1                                       | EN 14342                      |
| Brinell hardness (average value)                                                 | 4                                        | (BHN) EN 1534                 |
| Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II | $\geq 17$                                | EN ISO 10140-3 / EN ISO 717-2 |
| Thermal insulation value : board only (RT m <sup>2</sup> K/W)                    | 0.101                                    | EN ISO 10456:2007             |
| Thermal insulation value : with rag felt (RT m <sup>2</sup> K/W)                 | 0.121                                    | EN ISO 10456:2007             |
| Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m <sup>2</sup> K/W)   | 0.141                                    | EN ISO 10456:2007             |
| Thermal conductivity (W/m K)                                                     | 0.11                                     | EN 12664 / EN 14342:2013      |
| Taber Abraser/Lacquer's wear resistance                                          | 3500                                     | EN 13696                      |
| Slip Resistance                                                                  | Low risk of slip                         | BS 7976-2                     |
| Construction                                                                     | Softwood Veneer and Lamella core 3-layer |                               |



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

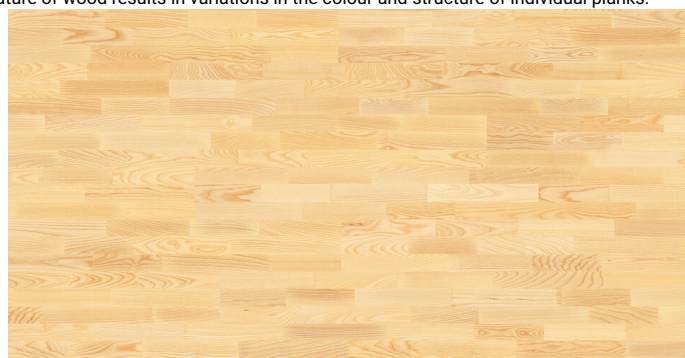

# Professional (13-14 mm) - ASH NATURE WHITE TRES (3-strip)

## Datasheet


| Product Information                                  | Tarkett Value                               |
|------------------------------------------------------|---------------------------------------------|
| Material code                                        | 7965019                                     |
| Format                                               | Plank 194 x 2281 mm                         |
| Pattern                                              | (3-strip)                                   |
| Surface treatment                                    | Proteco Natura                              |
| Surface effect                                       | None                                        |
| Wear layer thickness                                 | 3,5 mm                                      |
| Total thickness                                      | 14 mm                                       |
| Items per box                                        | 6                                           |
| Surface per box                                      | 2,66 m <sup>2</sup>                         |
| Surface per pallet                                   | 93,1 m <sup>2</sup>                         |
| Net weight                                           | 7,3 kg                                      |
| Character                                            | Lively                                      |
| Latin Name                                           | Fraxinus Angustifolia                       |
| Declaration of Performance #                         | 0020-0106                                   |
| EPD Number                                           | S-P-01509                                   |
| Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3) | -7,49 kg CO <sub>2</sub> eq /m <sup>2</sup> |
| LRV - overall average / Standard deviation           | 61 / 5                                      |

Due to the nature of the material this table shows typical values.

| Characteristics & Technical Performance                                          | Tarkett Value                            | Norm                          |
|----------------------------------------------------------------------------------|------------------------------------------|-------------------------------|
| Reaction to fire                                                                 | Dfl-s1                                   | EN 14342 - Table 1            |
| Formaldehyde emission                                                            | E1                                       | EN 14342                      |
| Brinell hardness (average value)                                                 | 4                                        | (BHN) EN 1534                 |
| Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II | $\geq 17$                                | EN ISO 10140-3 / EN ISO 717-2 |
| Thermal insulation value : board only (RT m <sup>2</sup> K/W)                    | 0.101                                    | EN ISO 10456:2007             |
| Thermal insulation value : with rag felt (RT m <sup>2</sup> K/W)                 | 0.121                                    | EN ISO 10456:2007             |
| Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m <sup>2</sup> K/W)   | 0.141                                    | EN ISO 10456:2007             |
| Thermal conductivity (W/m K)                                                     | 0.11                                     | EN 12664 / EN 14342:2013      |
| Slip Resistance                                                                  | Low risk of slip                         | BS 7976-2                     |
| Construction                                                                     | Softwood Veneer and Lamella core 3-layer |                               |



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

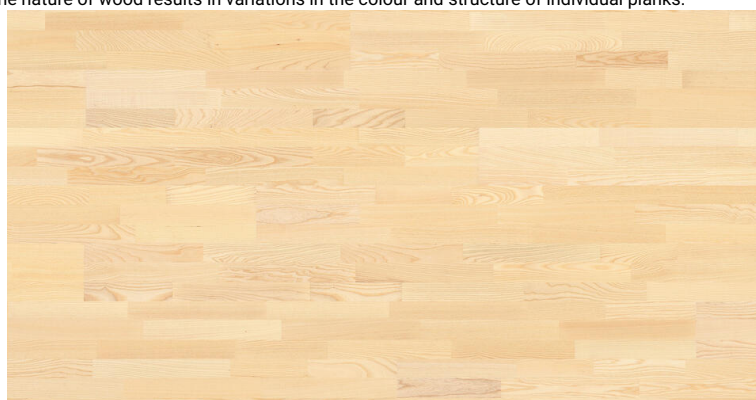

# Professional (13-14 mm) - OAK NATURE TRES 2027 (3-strip)

## Datasheet

| Product Information                                  | Tarkett Value                               |
|------------------------------------------------------|---------------------------------------------|
| Material code                                        | 8721007                                     |
| Format                                               | Plank 194 x 2027 mm                         |
| Pattern                                              | (3-strip)                                   |
| Surface treatment                                    | Proteco Natura                              |
| Surface effect                                       | None                                        |
| Wear layer thickness                                 | 3,5 mm                                      |
| Total thickness                                      | 14 mm                                       |
| Items per box                                        | 6                                           |
| Surface per box                                      | 2,36 m <sup>2</sup>                         |
| Surface per pallet                                   | 94,4 m <sup>2</sup>                         |
| Net weight                                           | 7,4 kg                                      |
| Character                                            | Calm                                        |
| Latin Name                                           | Quercus Robur & Quercus Petraea             |
| Declaration of Performance #                         | 0020-0106                                   |
| EPD Number                                           | S-P-01509                                   |
| Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3) | -7,49 kg CO <sub>2</sub> eq /m <sup>2</sup> |
| LRV - overall average / Standard deviation           | 26 / 4                                      |

Due to the nature of the material this table shows typical values.

| Characteristics & Technical Performance                                          | Tarkett Value                            | Norm                          |
|----------------------------------------------------------------------------------|------------------------------------------|-------------------------------|
| Reaction to fire                                                                 | Dfl-s1                                   | EN 14342 - Table 1            |
| Formaldehyde emission                                                            | E1                                       | EN 14342                      |
| Brinell hardness (average value)                                                 | 3.7                                      | (BHN) EN 1534                 |
| Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II | $\geq 17$                                | EN ISO 10140-3 / EN ISO 717-2 |
| Thermal insulation value : board only (RT m <sup>2</sup> K/W)                    | 0.101                                    | EN ISO 10456:2007             |
| Thermal insulation value : with rag felt (RT m <sup>2</sup> K/W)                 | 0.121                                    | EN ISO 10456:2007             |
| Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m <sup>2</sup> K/W)   | 0.141                                    | EN ISO 10456:2007             |
| Thermal conductivity (W/m K)                                                     | 0.11                                     | EN 12664 / EN 14342:2013      |
| Taber Abraser/Lacquer's wear resistance                                          | 3500                                     | EN 13696                      |
| Slip Resistance                                                                  | Low risk of slip                         | BS 7976-2                     |
| Construction                                                                     | Softwood Veneer and Lamella core 3-layer |                               |



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.



# Professional (13-14 mm) - OAK NATURE TRES 2027 (3-strip)

## Datasheet

| Product Information                                  | Tarkett Value                               |
|------------------------------------------------------|---------------------------------------------|
| Material code                                        | 8722014                                     |
| Format                                               | Plank 194 x 2027 mm                         |
| Pattern                                              | (3-strip)                                   |
| Surface treatment                                    | Proteco Lacquer                             |
| Surface effect                                       | None                                        |
| Wear layer thickness                                 | 2,5 mm                                      |
| Total thickness                                      | 13 mm                                       |
| Items per box                                        | 6                                           |
| Surface per box                                      | 2,36 m <sup>2</sup>                         |
| Surface per pallet                                   | 94,4 m <sup>2</sup>                         |
| Net weight                                           | 6,7 kg                                      |
| Character                                            | Calm                                        |
| Latin Name                                           | Quercus Robur & Quercus Petraea             |
| Declaration of Performance #                         | 0020-0104                                   |
| EPD Number                                           | S-P-01509                                   |
| Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3) | -7,49 kg CO <sub>2</sub> eq /m <sup>2</sup> |
| LRV - overall average / Standard deviation           | 27 / 4                                      |

Due to the nature of the material this table shows typical values.

| Characteristics & Technical Performance                                          | Tarkett Value                            | Norm                          |
|----------------------------------------------------------------------------------|------------------------------------------|-------------------------------|
| Reaction to fire                                                                 | Dfl-s1                                   | EN 14342 - Table 1            |
| Formaldehyde emission                                                            | E1                                       | EN 14342                      |
| Brinell hardness (average value)                                                 | 3.7                                      | (BHN) EN 1534                 |
| Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II | $\geq 17$                                | EN ISO 10140-3 / EN ISO 717-2 |
| Thermal insulation value : board only (RT m <sup>2</sup> K/W)                    | 0.101                                    | EN ISO 10456:2007             |
| Thermal insulation value : with rag felt (RT m <sup>2</sup> K/W)                 | 0.121                                    | EN ISO 10456:2007             |
| Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m <sup>2</sup> K/W)   | 0.141                                    | EN ISO 10456:2007             |
| Thermal conductivity (W/m K)                                                     | 0.104                                    | EN 12664 / EN 14342:2013      |
| Taber Abraser/Lacquer's wear resistance                                          | 4000                                     | EN 13696                      |
| Slip Resistance                                                                  | Low risk of slip                         | BS 7976-2                     |
| Construction                                                                     | Softwood Veneer and Lamella core 3-layer |                               |



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.



# Professional (13-14 mm) - OAK NATURE TRES 2027 (3-strip)

## Datasheet

| Product Information                                  | Tarkett Value                               |
|------------------------------------------------------|---------------------------------------------|
| Material code                                        | 8722015                                     |
| Format                                               | Plank 194 x 2027 mm                         |
| Pattern                                              | (3-strip)                                   |
| Surface treatment                                    | Proteco Natura                              |
| Surface effect                                       | None                                        |
| Wear layer thickness                                 | 2,5 mm                                      |
| Total thickness                                      | 13 mm                                       |
| Items per box                                        | 6                                           |
| Surface per box                                      | 2,36 m <sup>2</sup>                         |
| Surface per pallet                                   | 94,4 m <sup>2</sup>                         |
| Net weight                                           | 6,7 kg                                      |
| Character                                            | Calm                                        |
| Latin Name                                           | Quercus Robur & Quercus Petraea             |
| Declaration of Performance #                         | 0020-0104                                   |
| EPD Number                                           | S-P-01509                                   |
| Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3) | -7,49 kg CO <sub>2</sub> eq /m <sup>2</sup> |
| LRV - overall average / Standard deviation           | 26 / 4                                      |

Due to the nature of the material this table shows typical values.

| Characteristics & Technical Performance                                          | Tarkett Value                            | Norm                          |
|----------------------------------------------------------------------------------|------------------------------------------|-------------------------------|
| Reaction to fire                                                                 | Dfl-s1                                   | EN 14342 - Table 1            |
| Formaldehyde emission                                                            | E1                                       | EN 14342                      |
| Brinell hardness (average value)                                                 | 3.7                                      | (BHN) EN 1534                 |
| Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II | $\geq 17$                                | EN ISO 10140-3 / EN ISO 717-2 |
| Thermal insulation value : board only (RT m <sup>2</sup> K/W)                    | 0.101                                    | EN ISO 10456:2007             |
| Thermal insulation value : with rag felt (RT m <sup>2</sup> K/W)                 | 0.121                                    | EN ISO 10456:2007             |
| Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m <sup>2</sup> K/W)   | 0.141                                    | EN ISO 10456:2007             |
| Thermal conductivity (W/m K)                                                     | 0.104                                    | EN 12664 / EN 14342:2013      |
| Taber Abraser/Lacquer's wear resistance                                          | 3500                                     | EN 13696                      |
| Slip Resistance                                                                  | Low risk of slip                         | BS 7976-2                     |
| Construction                                                                     | Softwood Veneer and Lamella core 3-layer |                               |



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

